



Smart LED Lighting

45W

LED Retrofit Kits



Suitable for Outdoor Pole/Arm-Mounted Area and Roadway Luminaires.

Features & Benefits:

- Built-in Surge Suppressors & Transient Protection
- High Power Factor UL Listed LED Driver
- 5-Years / 50,000 Hours (*) Warranty
- Bright • High CRI
- Low THD




Model	Product	Size	Power	Flux	Equivalent
LRK-45W-57KC	45W 5,700K LED Retrofit Kit	<u>LED Engine</u> (L) 4¾" (W) 4¾" (D) 1¾"	46.4W	4,784 Lumen	150/175W MH or HPS
<p>• Rated Voltage: 120-277Vac ~50/60Hz • P.F. > 0.9 • >100lm/W • CRI ≈ 70 • •(*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. • Beam Angle 90° • Pigtail Wire/Cable LED Driver to Mains •</p>					



45W


Smart LED Lighting

LED Retrofit Kits

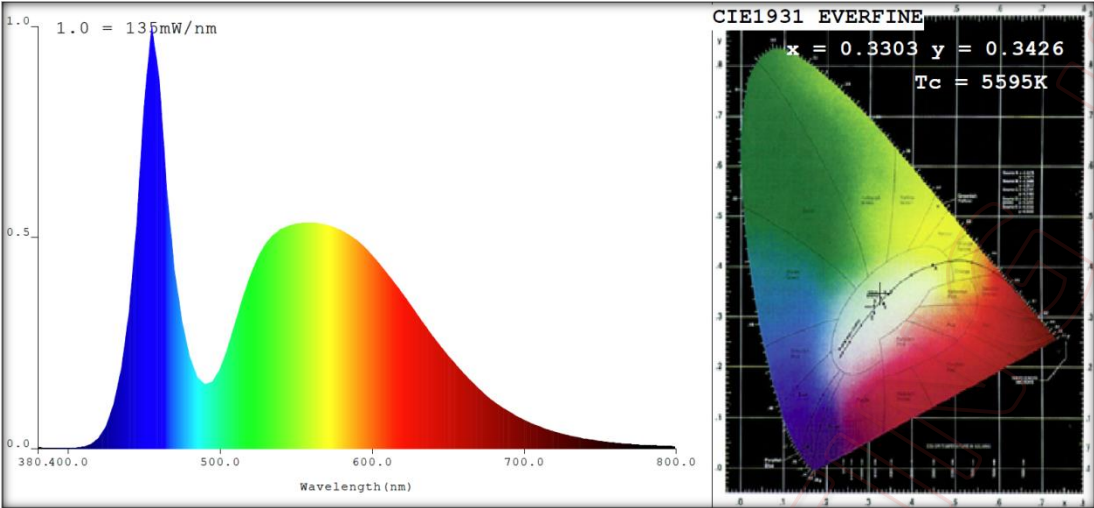

Light & Bright

**Size / Dimensions
LED Engine**
(L) 4¾" (W) 4¾"
(D) 1¾"

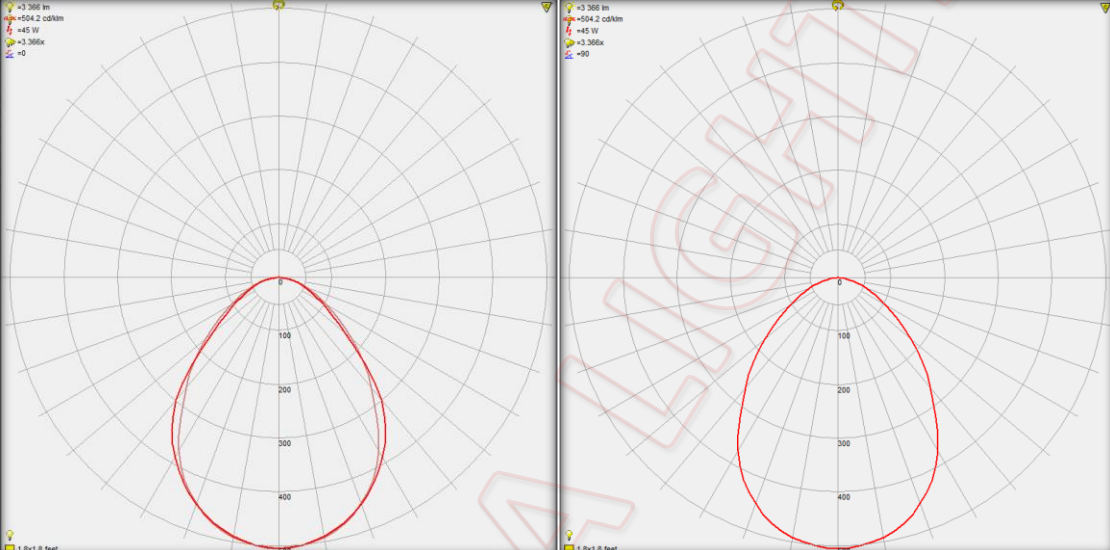

Model	Product	Power	Equivalent
LRK-45W-57KC	45W 5,700K LED Retrofit Kit	46.4W	150W/175W MH &/or HPS Lamp
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	46.4W Max. P.F. > 0.9	>100 lm/W	4,784 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI ≈ 70	5,700K CCT ±10%	90°	50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.