



120W Hi-Bay LED Fixture

**LED High-Bay Luminaires for
Commercial & Industrial Buildings
IP65 Dust & Water Proof**

Features & Benefits:

- Great Energy Savings !
- Directive 60°/90° Beam Angle
- 5-Years | 50,000 Hours Warranty (*)
- High Power Factor – UL Listed Driver
- Bright – High CRI – High Lumen Output
- Built-in Surge Suppressors & Protection
- CCT 5,500K ideal for MH Lamps Replacement



45°/60°/90°/120° Beam Angle
available on request

IP65 ≈ NEMA Enclosure Rating 4




| Model | Product | Size | Power | Flux | Equivalent |
|-----------------------|--|--------------------------------------|-------------|-----------------|-----------------|
| HBF-120W-55K-60d-277V | 120W High Bay LED Fixture 5,500K 60° 100-277Vac | (dia.) 10 1/4" x (H) 3 1/2" | 120W Max | 18,600 Lumen | 400W MH Lamp |
| HBF-120W-55K-90d-277V | 120W High Bay LED Fixture 5,500K 90° 100-277Vac | | 120W Max | 18,600 Lumen | 400W MH Lamp |
| HBF-120W-55K-60d-480V | 120W High Bay LED Fixture 5,500K 60° 208-480Vac | | 120W Max | 18,600 Lumen | 400W MH Lamp |
| HBF-120W-55K-90d-480V | 120W High Bay LED Fixture 5,500K 90° 208-480Vac | | 120W Max | 18,600 Lumen | 400W MH Lamp |


- 120-277Vac or 208-480Vac ~50/60Hz • P.F. > 0.9 • Chain Hook + 6ft. Cable/Loose Leads Wires • THD <20% •
- (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_[A] 25°C Max. • CCT 5500K (55K) ±10% • CRI > 70 • ~155 lm/W •
- "Equivalent" ÷ Comparable Equivalence to Metal Halide (MH) Lamp & Fixtures



120W Hi-Bay LED Fixture

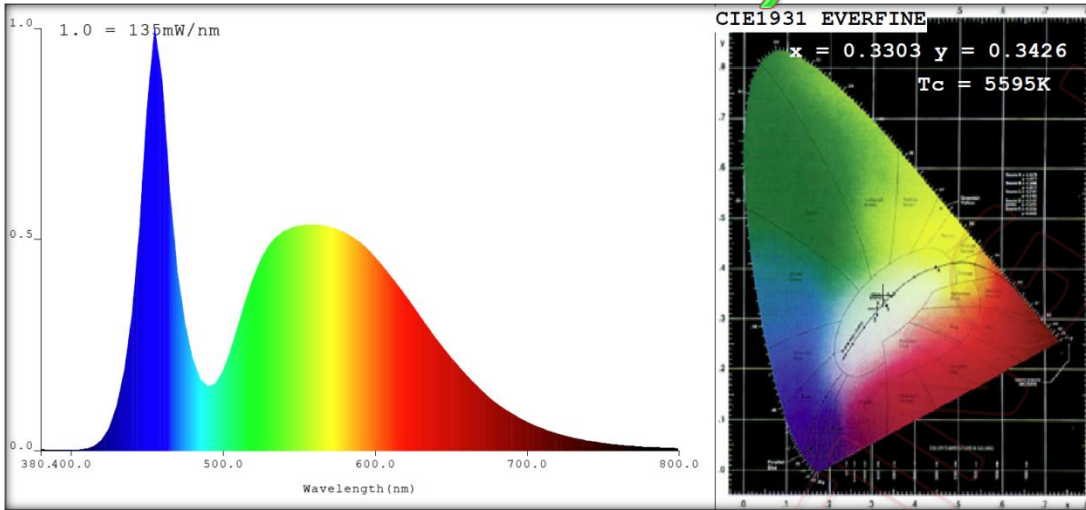

Size / Dimensions
Ø 10¼" (dia.)
H 3½" (Height)

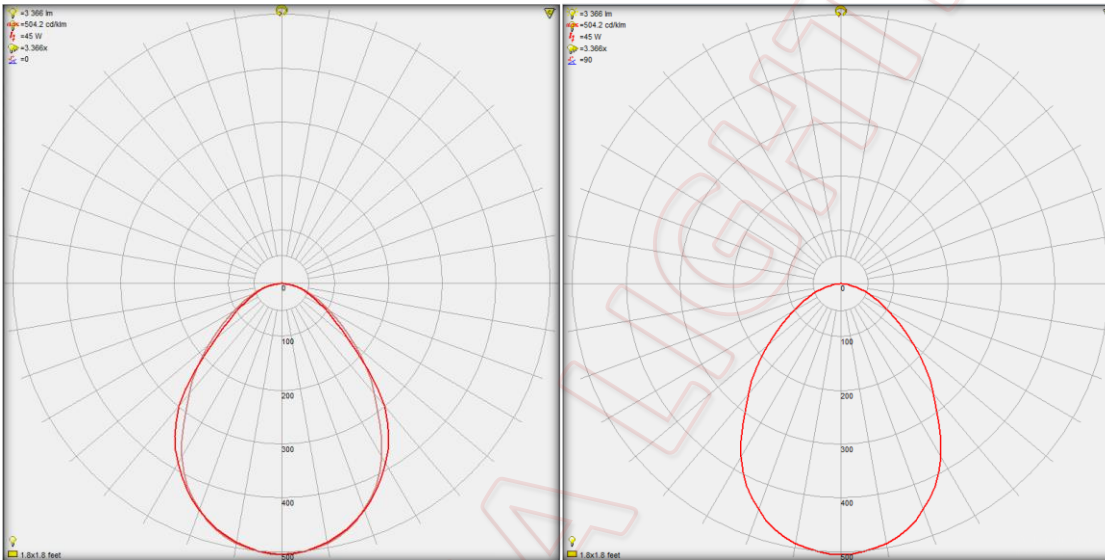

| Model | Product | Power | Equivalent |
|--|--------------------------------------|--------------------------|---|
| HBF-120W-55K-xxd-277V HBF-120W-55K-xxd-480V | Hi-Bay LED Fixture 120W CCT 5500K | 120W | 400W MH Lamp High-Bay Light Fixture |
| Input Voltage | Power/Power Factor | Efficacy | Flux |
| "277V": 120-277Vac ~50/60Hz "480V": 208-480Vac ~50/60Hz | 120W Max. P.F. ≈ 0.97 | ~155 lm/W | 18,600 Lumen |
| Color Rendering | Color Temperature | Beam Angle | Life |
| CRI ÷ 75~80 | CCT 5500K ±10% | "60d": 60° "90d": 90° | 50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max. |