



# 75W Post Top LED Area Luminaire


Outdoor Pole/Arm-Mounted Area and Roadway Luminaire

## Features & Benefits:



- Great Energy Savings !
- Directive 90° Beam Angle
- 5-Years | 50,000 Hours Warranty (\*)
- High Power Factor – UL Listed Driver
- Bright – High CRI – High Lumen Output
- Built-in Surge Suppressors & Protection
- CCT 5,000K ideal for MH Lamps Replacement





Model	Product	Size	Power	Flux	Equivalent
ALF-75W-50K-277V 	Post Top LED Area Light 75W 5000K 277V	(L) 25 <sup>3</sup> / <sub>4</sub> " (Ø) 17 <sup>3</sup> / <sub>4</sub> "	75W	9,200 lm	320W MH
ALF-75W-50K-480V	Post Top LED Area Light 75W 5000K 480V	(L) 25 <sup>3</sup> / <sub>4</sub> " (Ø) 17 <sup>3</sup> / <sub>4</sub> "	75W	9,200 lm	320W MH

- "277V" 120-277Vac || "480V" 208-480Vac ~50/60Hz • P.F. > 0.9 • THD < 20% • Terminal Block •
- Color Temp. (CCT) 5000K ±10% • 123 Lumen per Watt • CRI ≈ 70 •
- Post Top Mount: O.D. 2<sup>3</sup>/<sub>8</sub>" (Standard) or O.D. 3" (Optional) •
- (\*) Rated Life 50,000 Hrs. (L<sub>70</sub> B<sub>50</sub>) at T<sub>[A]</sub> 25°C Max. •



# 75W Post Top LED Area Luminaire

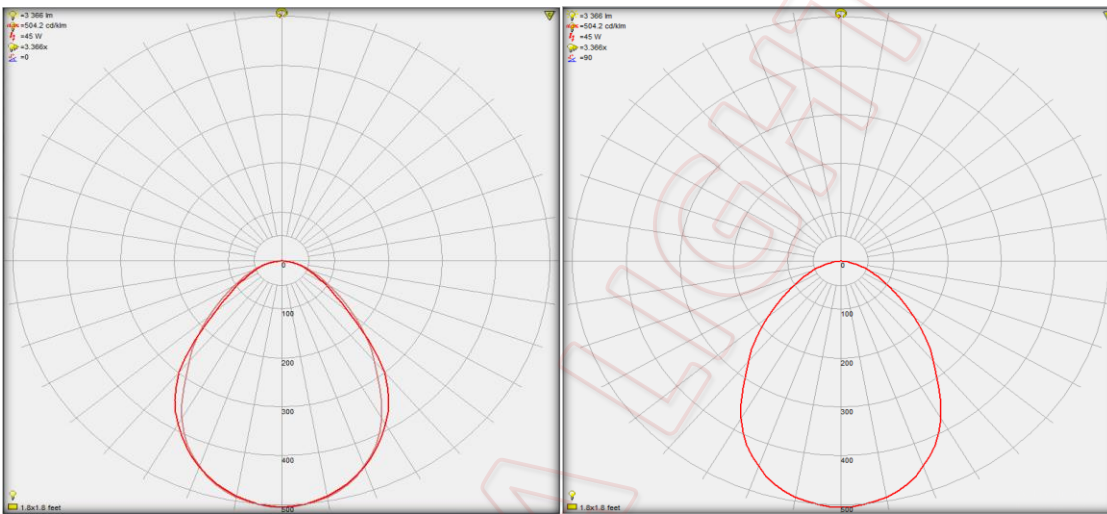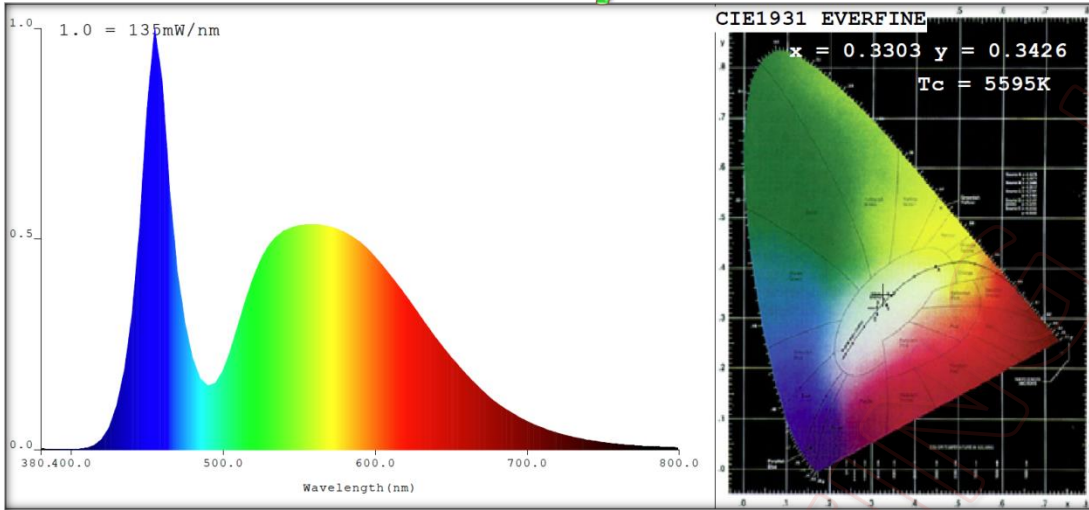

Model	Product	Power	Equivalent
ALF-75W-50K-277V ALF-75W-50K-480V	Post Top LED Area Light 75W 5000K	75W	320W MH
<b>Input Voltage</b>	<b>Power Factor</b>	<b>Efficacy</b>	<b>Flux</b>
"277V": 120-277Vac "480V": 208-480Vac	P.F. ≈ 0.9 ~50/60Hz	123 lm/W	9,200 Lumen
<b>Color Rendering</b>	<b>Color Temperature</b>	<b>Beam Angle</b>	<b>Life</b>
CRI ÷ 70	CCT 5000K ±10%	90°	5-Years / 50,000 Hrs (L <sub>70</sub> B <sub>50</sub> ) T <sub>[A]</sub> 25°C.



# 75W Post Top LED Area Luminaire

## Assembly Drawings

