



**105W**



# LED Retrofit Kits

**Suitable for Outdoor Pole/Arm-Mounted Area and Roadway Luminaires.**

**Features & Benefits:**

- Built-in Surge Suppressors & Transient Protection
- High Power Factor UL Listed LED Driver
- 5-Years / 50,000 Hours (\*) Warranty
- Bright • High CRI
- Low THD






Model	Product	Size	Power	Flux	Equivalent
LRK-105W-57KC	105W 5,700K LED Retrofit Kit	<u>LED Engine</u> (L) 6 7/8" (W) 5" (D) 2 3/8"	105W	13,000 Lumen	400W MH or HPS
LRK-105W-57KC-HV	105W 5,700K LED Retrofit Kit 480V	<u>LED Engine</u> (L) 6 7/8" (W) 5" (D) 2 3/8"	105W	13,000 Lumen	400W MH or HPS

• Rated Voltage: 120-277Vac ~50/60Hz • P.F. > 0.9 • >130lm/W • CRI ≈ 70 •  
 •(\*) Rated Life 50,000 Hrs. (L<sub>70</sub> B<sub>50</sub>) at T<sub>A</sub> 25°C Max. • Beam Angle 90° • Pigtail Wire/Cable LED Driver to Mains •



# 105W LED Retrofit Kits

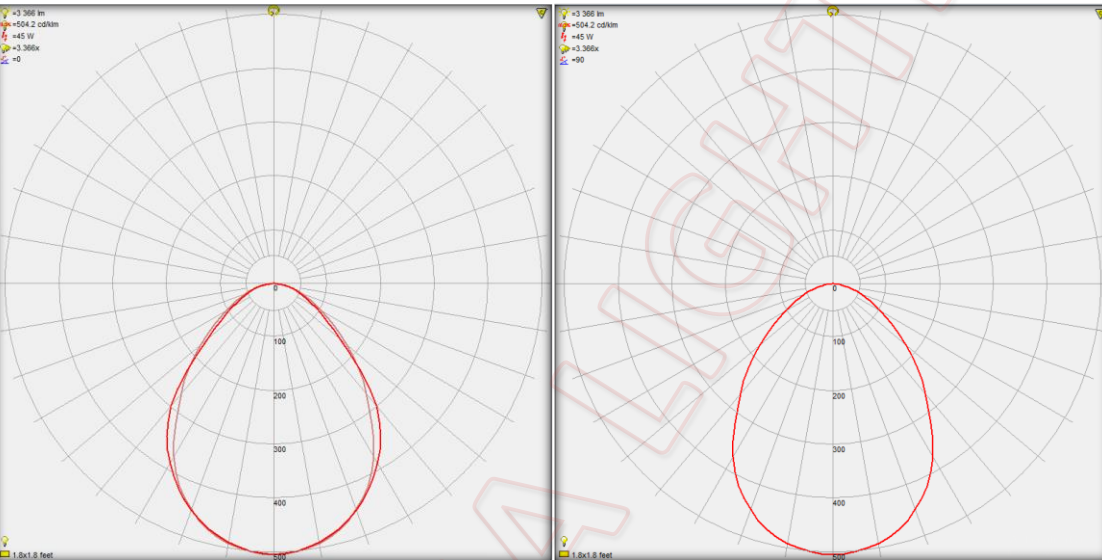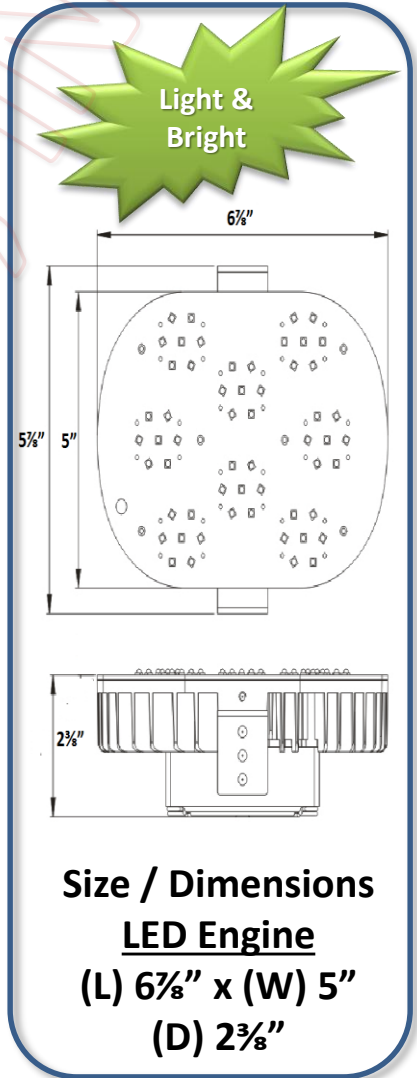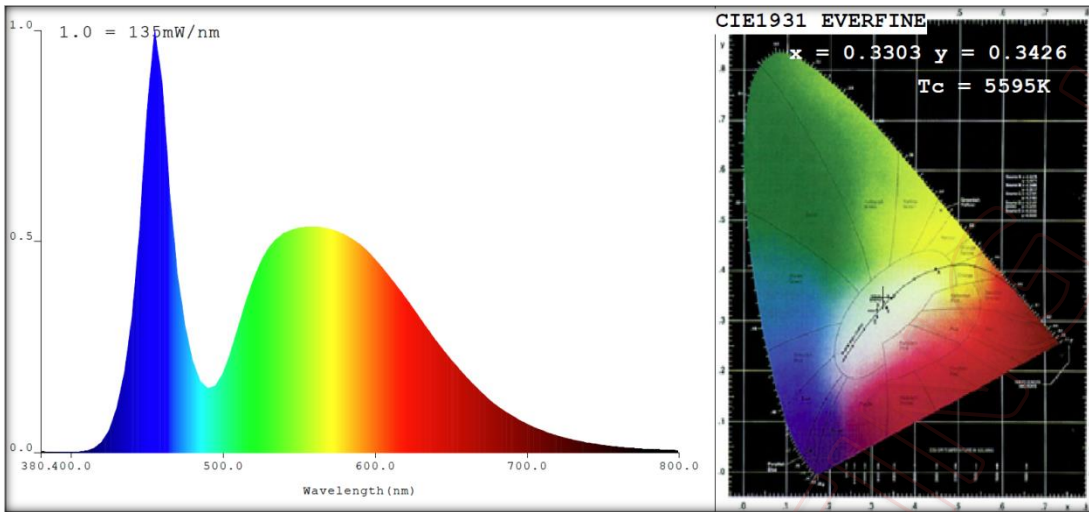

Model	Product	Power	Equivalent
LRK-105W-57KC	105W 5,700K LED Retrofit Kit	105W	400W MH &/or HPS Lamp
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	105W Max. P.F. > 0.9	>130 lm/W	13,000 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI ≈ 70	5,700K CCT ±10%	90°	50,000 Hours (L <sub>70</sub> B <sub>50</sub> ) T <sub>[A]</sub> 25°C Max.