



120W LED Retrofit Kits

**Suitable for Outdoor Pole/Arm-Mounted Area
and Roadway Luminaires.**

Features & Benefits:

- Built-in Surge Suppressors & Transient Protection
- High Power Factor UL Listed LED Driver
- 5-Years / 50,000 Hours (*) Warranty
- Bright • High CRI
- Low THD




Model	Product	Size	Power	Flux	Equivalent
LRK-120W-57KC	120W 5,700K LED Retrofit Kit	<u>LED Engine</u> (L) 6 7/8" (W) 5" (D) 2 3/8"	120W	15,000 Lumen	600W MH or HPS
LRK-120W-57KC-HV	120W 5,700K LED Retrofit Kit 480V	<u>LED Engine</u> (L) 6 7/8" (W) 5" (D) 2 3/8"	120W	15,000 Lumen	600W MH or HPS

• Rated Voltage: 120-277Vac ~50/60Hz • P.F. > 0.9 • >130lm/W • CRI ≈ 70 •

•(*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_[A] 25°C Max. • Beam Angle 90° • Pigtail Wire/Cable LED Driver to Mains •



120W LED Retrofit Kits

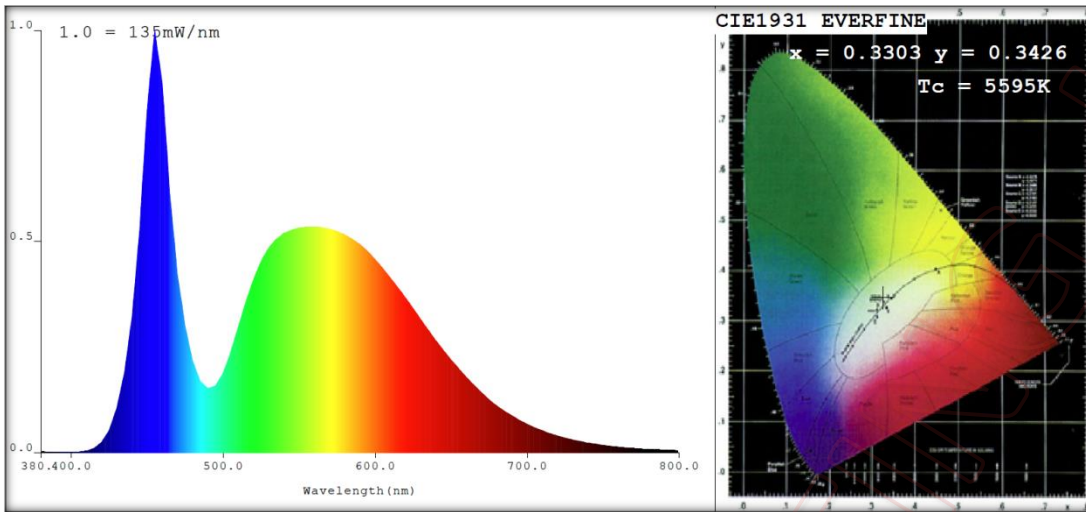


Light & Bright

6 7/8"

5 7/8" 5"

2 3/8"

**Size / Dimensions
LED Engine**
(L) 6 7/8" x (W) 5"
(D) 2 3/8"

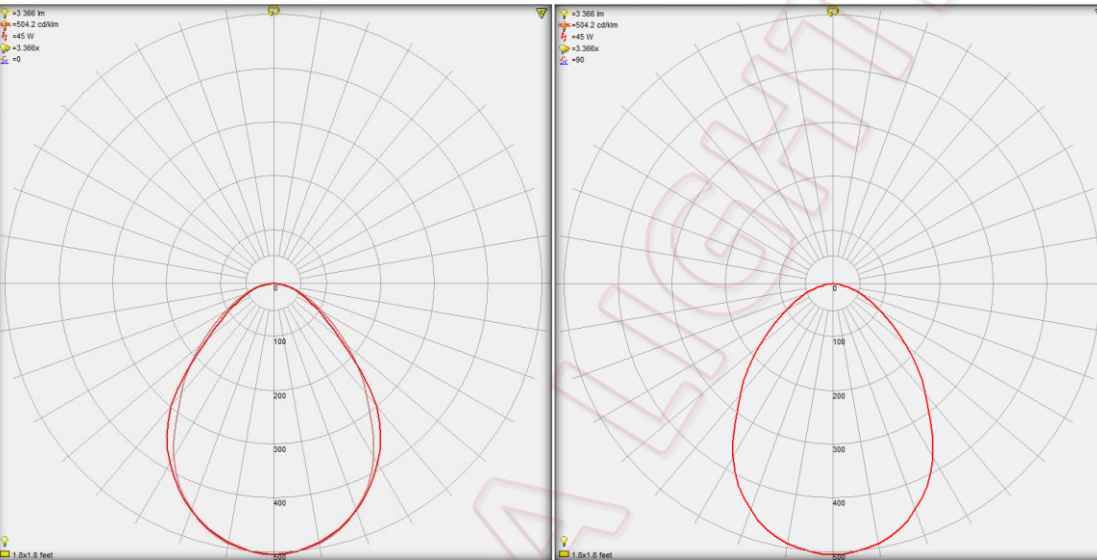

Model	Product	Power	Equivalent
LRK-120W-57KC	120W 5,700K LED Retrofit Kit	120W	600W MH &/or HPS Lamp
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	125W Max. P.F. > 0.9	>130 lm/W	15,000 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI ≈ 70	5,700K CCT ±10%	90°	50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.