



240W HV


LED Retrofit Kits



**Suitable for Outdoor Pole/Arm-Mounted Area
and Roadway Luminaires.**

Features & Benefits:

- Built-in Surge Suppressors & Transient Protection
- High Power Factor UL Listed LED Driver
- 5-Years / 50,000 Hours (*) Warranty
- Bright • High CRI
- Low THD

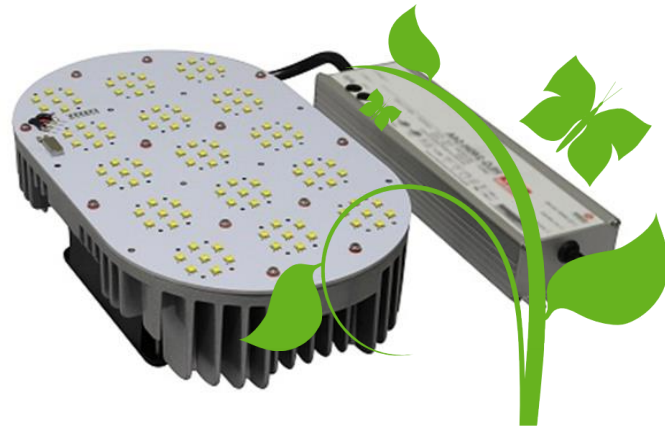


Model	Product	Size	Power	Flux	Equivalent
LRK-240W-57KC	240W 5,700K LED Retrofit Kit	<u>LED Engine</u> (L) 10 ³ / ₈ " (W) 6 ¹ / ₄ " (D) 2 ³ / ₈ "	241W	31,200 Lumen	600W/1000W MH or HPS
LRK-240W-57KC-HV	240W 5,700K LED Retrofit Kit 480V	<u>LED Engine</u> (L) 10 ³ / ₈ " (W) 6 ¹ / ₄ " (D) 2 ³ / ₈ "	241W	31,200 Lumen	600W/1000W MH or HPS

• Rated Voltage: 200-480Vac ~50/60Hz • P.F. > 0.9 • >130lm/W • CRI ≈ 70 •


•(*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_[A] 25°C Max. • Beam Angle 90° • Pigtail Wire/Cable LED Driver to Mains •




240W HV LED Retrofit Kits

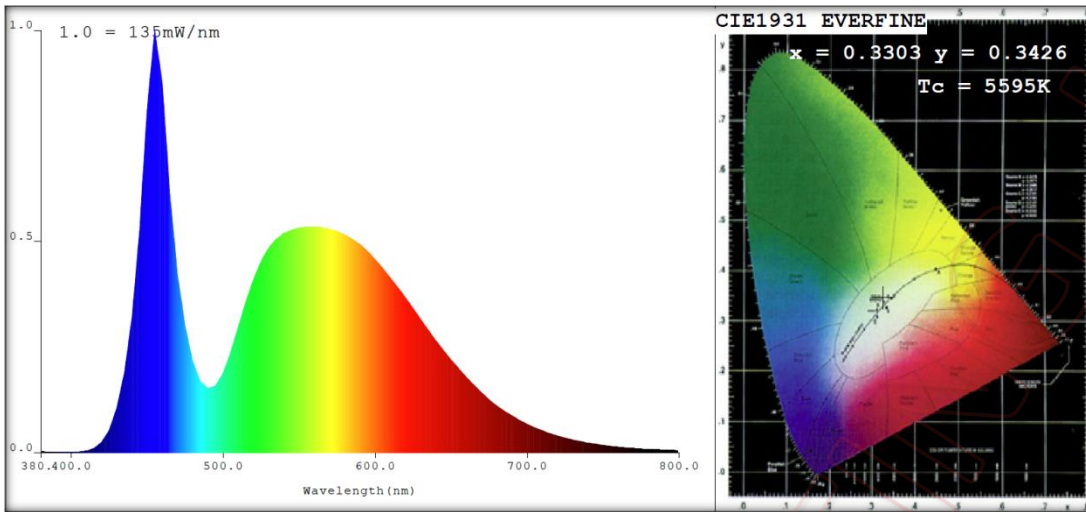

Light & Bright

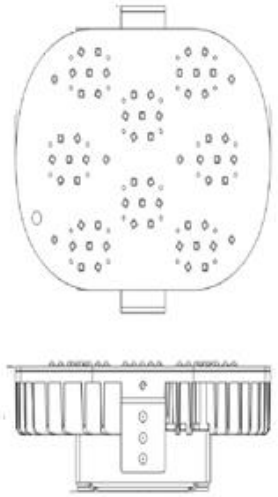

**Size / Dimensions
LED Engine**
(L) 10³/₈" x (W) 6¹/₄"
(D) 2³/₈"

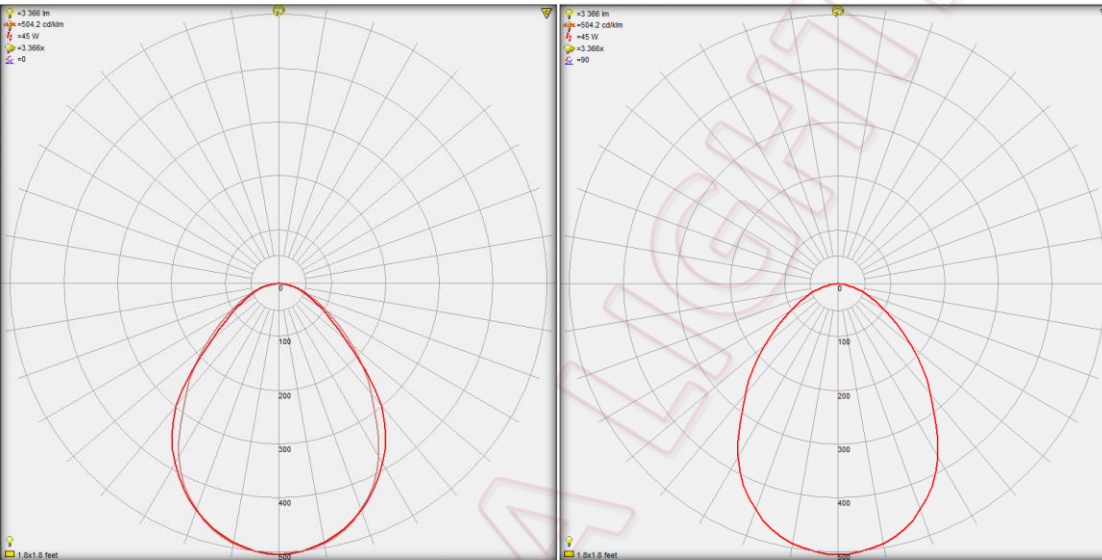

Model	Product	Power	Equivalent
LRK-240W-57KC-HV	240W 5,700K LED Retrofit Kit	241W	600W/1000W MH &/or HPS Lamp
Input Voltage	Power/Power Factor	Efficacy	Flux
200-480Vac ~50/60Hz	241W Max. P.F. > 0.9	>130 lm/W	31,200 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI ≈ 70	5,700K CCT ±10%	90°	50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.