



# 320W

## LED Retrofit Kits



**Suitable for Outdoor Pole/Arm-Mounted Area  
and Roadway Luminaires.**

### Features & Benefits:

- Built-in Surge Suppressors & Transient Protection
- High Power Factor UL Listed LED Driver
- 5-Years / 50,000 Hours (\*) Warranty
- Bright • High CRI
- Low THD




Model	Product	Size	Power	Flux	Equivalent
LRK-320W-57KC	320W 5,700K LED Retrofit Kit	<u>LED Engine</u> (L) 12 $\frac{3}{8}$ " (W) 9 $\frac{1}{4}$ " (D) 3"	320W	41,600 Lumen	1,000W MH or HPS
LRK-320W-57KC- HV	320W 5,700K LED Retrofit Kit 480V	<u>LED Engine</u> (L) 12 $\frac{3}{8}$ " (W) 9 $\frac{1}{4}$ " (D) 3"	320W	41,600 Lumen	1,000W MH or HPS

• Rated Voltage: 120-277Vac ~50/60Hz • P.F. > 0.9 • ~130lm/W • CRI ≈ 70 •


•(\*) Rated Life 50,000 Hrs. (L<sub>70</sub> B<sub>50</sub>) at T<sub>A</sub> 25°C Max. • Beam Angle 90° • Pigtail Wire/Cable LED Driver to Mains •




# 320W LED Retrofit Kits

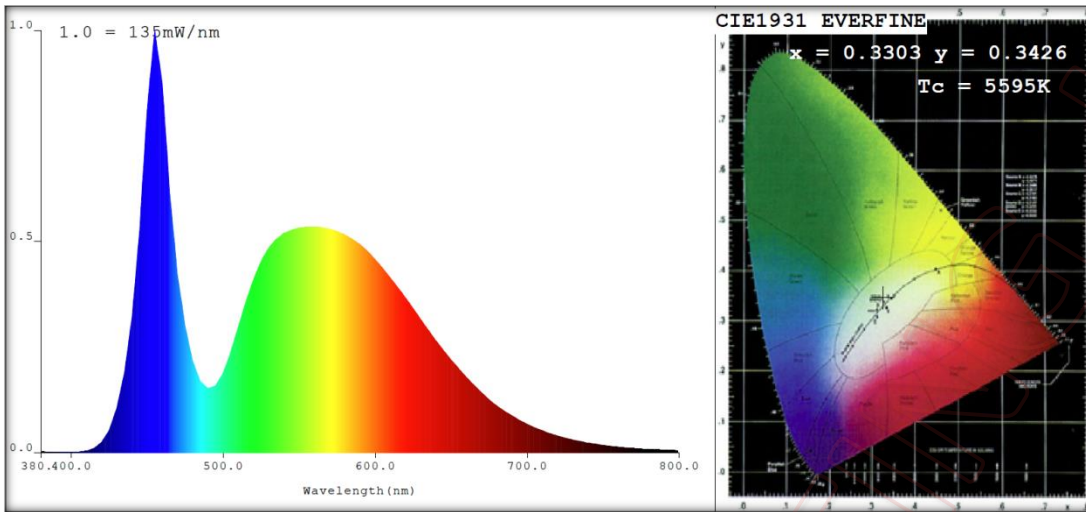

**Light & Bright**

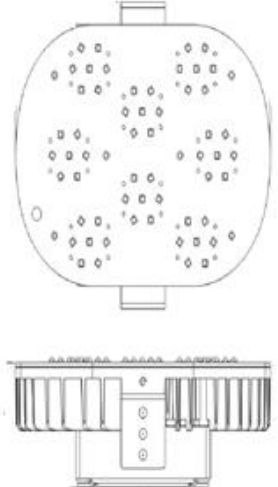

**Size / Dimensions  
LED Engine  
(L) 12<sup>5</sup>/<sub>8</sub>" x (W) 9<sup>1</sup>/<sub>4</sub>"  
(D) 3"**

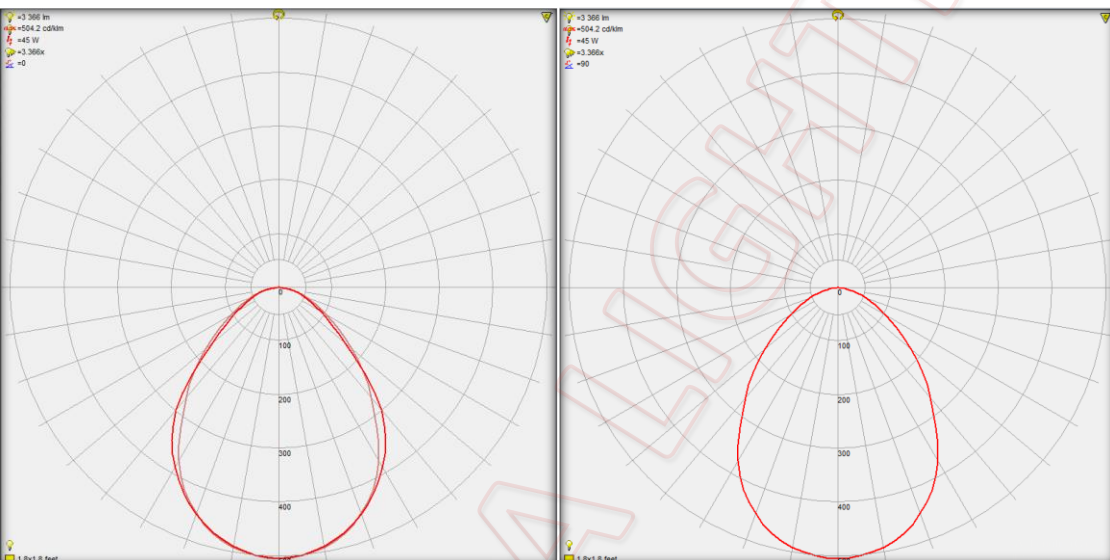

Model	Product	Power	Equivalent
LRK-320W-57KC	320W 5,700K LED Retrofit Kit	320W	1000W MH &/or HPS Lamp
<b>Input Voltage</b>	<b>Power/Power Factor</b>	<b>Efficacy</b>	<b>Flux</b>
120-277Vac ~50/60Hz	325W Max. P.F. > 0.9	~130 lm/W	41,600 Lumen
<b>Color Rendering</b>	<b>Color Temperature</b>	<b>Beam Angle</b>	<b>Life</b>
CRI ≈ 70	5,700K CCT ±10%	90°	50,000 Hours (L <sub>70</sub> B <sub>50</sub> ) T <sub>[A]</sub> 25°C Max.