



120W Slim LED Shoebox Fixture

Outdoor Pole/Arm-Mounted Area and Roadway Luminaire

- 5-Years | 50,000 Hours Warranty (*) •
- High CRI • High Lumen Output •
- High Power Factor • Low THD •
- Horizontal Type II, Type III •
- Built-in Surge Protection •






Model	Product	Size	Power	Flux	Equivalent
SBF-120W-55K-277V	Slim LED Shoebox Fixture 100W 55K 277V	(L)24.8" (W)8.5" (D)3.3"	120W	18,000 lm	600W MH
SBF-120W-55K-480V	Slim LED Shoebox Fixture 100W 55K 480V	(L)24.8" (W)8.5" (D)3.3"	120W	18,000 lm	600W MH

- "277V" 120-277Vac || "480V" 208-480Vac ~50/60Hz • P.F. > 0.9 • THD < 20% • Terminal Block •
- Color Temp. (CCT) 5500K ±10% • 150 Lumen per Watt • CRI ≈ 80 •
- (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_[A] 25°C Max. •



120W LED Replacement Fixture

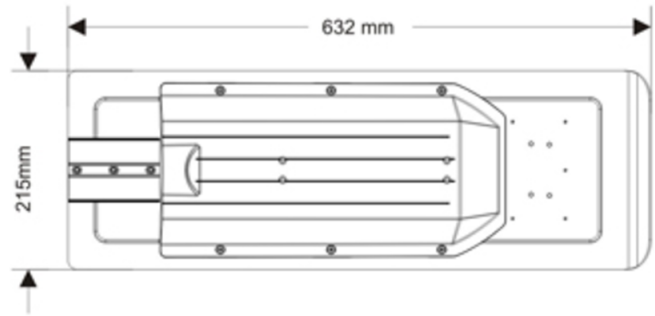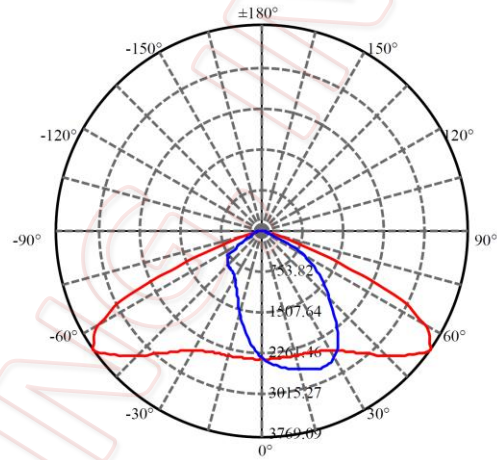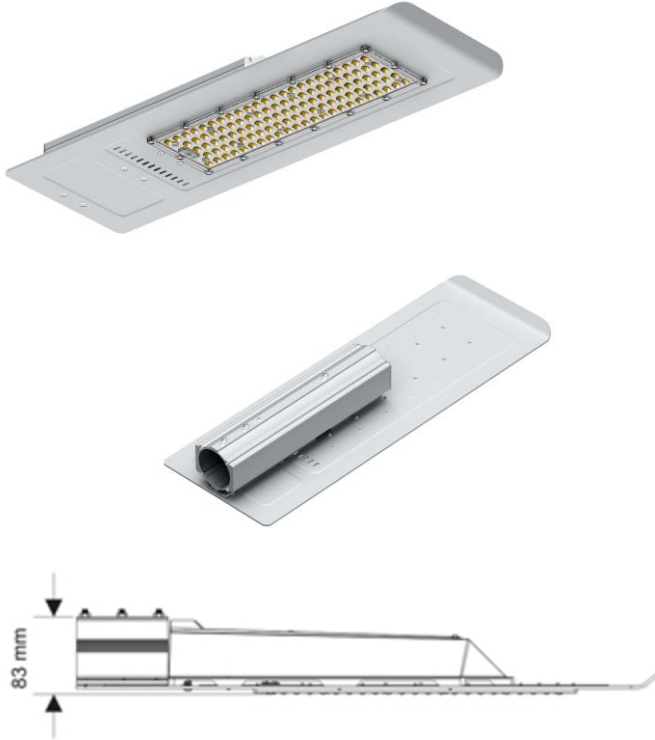

Model	Product	Power	Equivalent
SBF-120W-55K-277V	120W LED Replacement Fixture	120W	400W MH
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz 208-480Vac ~50/60Hz	60W P.F. ≈ 0.97	~150 lm/W	18,000 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI ÷ 75~80	22K ÷ CCT 2,200K ±10%	150°x75°	5-Years / 50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.