



2x2' 40W LED Lay-in Troffer

Luminaires for Ambient Lighting of Interior Commercial Spaces

- Built-in Surge Suppressors & Protection •
- Bright • High CRI • High Lumen Output •
- High Power Factor • Self Ballasted •
- Rated Life 50,000 Hours (*) •



Model	Product	Power	Flux	Equivalent *
T-BAR-2x2FT-30W-50K	T-Bar 2x2' LED Fixture 40W 3000K 100~277V	40W	5,000 Lumen	3~4 x F17T8 (2ft., 17W ea.)
T-BAR-2x2FT-40W-50K	T-Bar 2x2' LED Fixture 40W 4000K 100~277V	40W	5,400 Lumen	2 x F32T8 (4ft., 32W ea.)
T-BAR-2x2FT-50W-50K	T-Bar 2x2' LED Fixture 40W 5000K 100~277V	40W	5,400 Lumen	2 x FB32T8 (U-Bent, 32W ea.)


Emergency Driver Adder:
"BU"

EMD-20W-277V: Emergency Battery Backup .
"BU": 2000 lumens for a minimum of 90 minutes

- 120-277Vac ~50/60Hz • Pigtail Wire/Cable • P.F. > 0.9 • ~135 lm/W • CRI ≈ 80 •
- (*) Rated Life > 50,000 Hrs. (L₇₀ B₅₀) at T_[A] 25°C Max. •
- CCT 5500K (55K) ±10% •




2x2' 40W LED Troffer

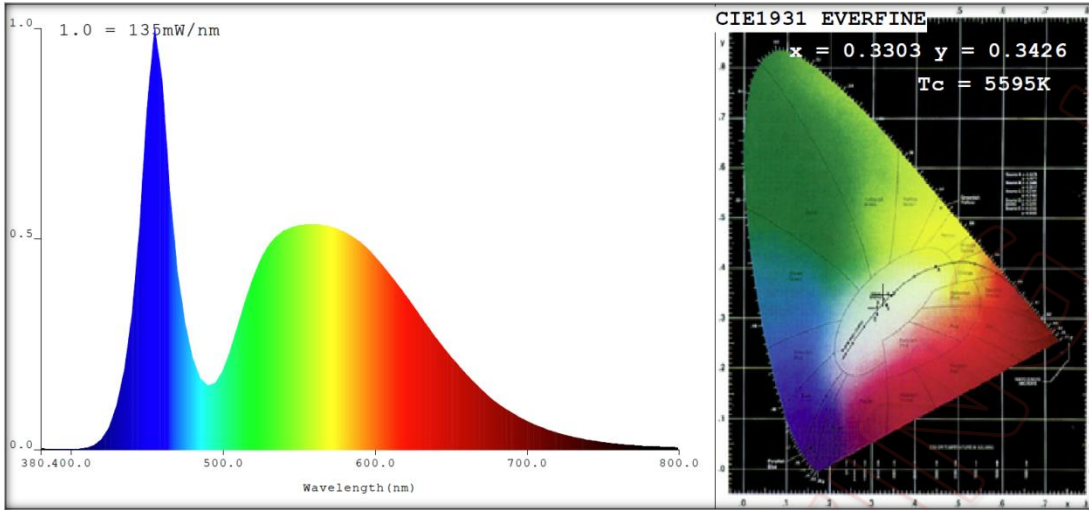

Slim & Bright



Size / Dimensions
L = 24" (60cm)
W = 24" (60cm)
T = 1 5/8" (4cm)

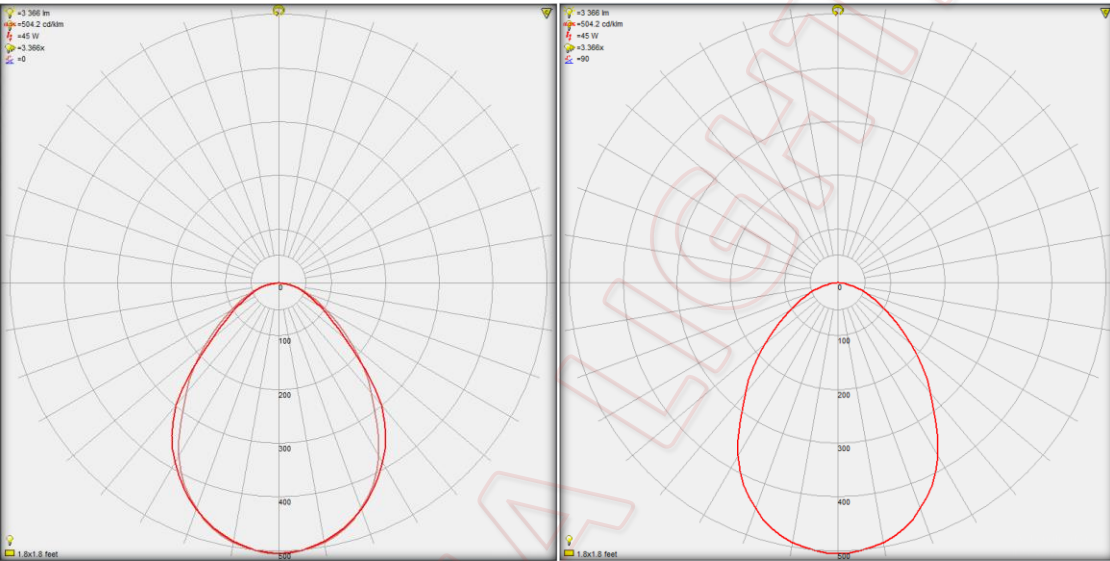

Model	Product	Power	Equivalent
T-BAR-2x2FT-40W-xxK	T-Bar 2x2' Lay-in Troffer	40W	T8/T12 U-Bent Tube
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	40W Max. P.F. ≈ 0.94	~135 lm/W	5,400 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI ÷ ~80	3000K, 4000K, 5000K CCT ±10%	120°	5-Years / 50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.