



# UVC PTAC LED Disinfection Lighting

Olympia's Patented UVC Air Disinfection solutions facilitate a healthy indoor environment and peace of mind.

Our PTAC/VTAC devices produce UVC light at optimal disinfection wavelength in circulating air systems, strong enough to deactivate microorganisms such as Bacteria, Viruses, and Mold.




ETL CLASSIFIED





# UVC PTAC LED Disinfection Lighting

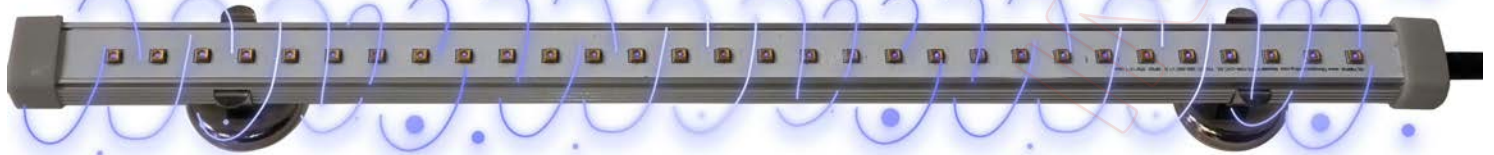

**Safely Disinfect the Air from Viruses, Bacteria & Mold**

**Simple Installation, Mounts in Seconds**

**UVC Irradiation & Air Convection**

**High UVC Intensity ( $\mu\text{W}/\text{cm}^2$ )**

**ETL Classified to UL 2043**

**5-Years | 30,000 Hours Warranty<sup>(\*)</sup>**



Model	Product	Size	Power	Irradiance	BTU
F15T5-15W-UVC-DL (Optional 24VDC)	UVC T5 LED Tube 15W 120~277VAC With Magnets & Cord	$\varnothing$ 1" x L 15"	15W UVC 315mW	60 @ 12" 170 @ 6" ( $\mu\text{W}/\text{cm}^2$ )	7,000 BTU
F20T5-20W-UVC-DL (Optional 24VDC)	UVC T5 LED Tube 20W 120~277VAC With Magnets & Cord	$\varnothing$ 1" x L 20"	20W UVC 441mW	80 @ 12" 230 @ 6" ( $\mu\text{W}/\text{cm}^2$ )	9,000 BTU
F25T5-30W-UVC-DL (Optional 24VDC)	UVC T5 LED Tube 30W 120~277VAC With Magnets & Cord	$\varnothing$ 1" x L 25"	30W UVC 630mW	120 @ 12" 340 @ 6" ( $\mu\text{W}/\text{cm}^2$ )	12,000 BTU
F30T5-30W-UVC-DL (Optional 24VDC)	UVC T5 LED Tube 30W 120~277VAC With Magnets & Cord	$\varnothing$ 1" x L 30"	30W UVC 630mW	120 @ 12" 340 @ 6" ( $\mu\text{W}/\text{cm}^2$ )	12,000 BTU
F36T5-30W-UVC-DL (Optional 24VDC)	UVC T5 LED Tube 30W 120~277VAC With Magnets & Cord	$\varnothing$ 1" x L 36"	30W UVC 630mW	120 @ 12" 340 @ 6" ( $\mu\text{W}/\text{cm}^2$ )	12,000 BTU

- "DL" 120-277Vac ~50/60Hz • "24VDC" 12~30VDC • PF > 0.9 • 2ft Cord •
- (\*) Rated Life 30,000 Hrs. (L<sub>70</sub> B<sub>50</sub>) at T<sub>[A]</sub> 25°C Max. • UVC 265nm •