




# Modular Up Light LED Fixture

**250W LED Luminaires for  
Commercial & Industrial Buildings  
IP65 Dust & Water Proof**

## Features & Benefits:

- Great Energy Savings !
- Directive NF/MF/WF Beam Angle
- 5-Years | 50,000 Hours Warranty(\*)
- High Power Factor – UL Listed Driver
- Bright – High CRI – High Lumen Output
- Built-in Surge Suppressors & Protection
- CCT 5500K, 4000K, 3000K for MH & HPS Replacement

Powered by  
**PHILIPS  
LUMILEDS**

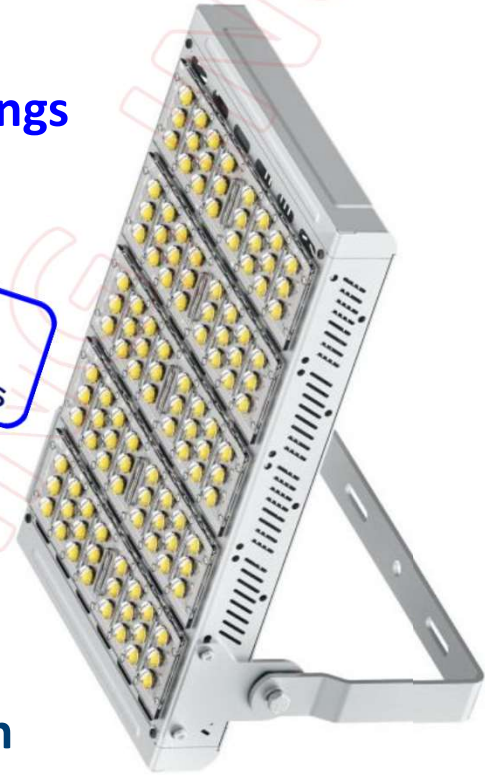

40° / 90° / 150°x80° Beam Angle  
available on request

IP65 ≈ NEMA Enclosure Rating 4



Model	Product	Size	Power	Flux	Equivalent
MFL-250W-30K-NF-277V MFL-250W-30K-NF-480V	Modular Up Light LED Fixture 250W 3000K 40° 277/480Vac	(L) 21¼"	250W Max	37,500 Lumen	1,000W MH Lamp
MFL-250W-40K-NF-277V MFL-250W-40K-NF-480V	Modular Up Light LED Fixture 250W 4000K 40° 277/480Vac	(W) 12"	250W Max	37,500 Lumen	1,000W MH Lamp
MFL-250W-55K-NF-277V MFL-250W-55K-NF-480V	Modular Up Light LED Fixture 250W 5500K 40° 277/480Vac	(H) 3⅜"	250W Max	37,500 Lumen	1,000W MH Lamp

- "277V": 120-277Vac or "480V": 208-480Vac ~50/60Hz • P.F. > 0.9 • 3ft. Cable/Loose Leads Wires • THD <20% •
- CCT 5500K (55K), 4000K (40K), 3000K (30K) ±10% • CRI > 70 • ~150 lm/W •
- "NF" Narrow Flood 40°, "MF" Medium Flood 90°, "WF" Wide Flood 150°x80° •
- (\*) Rated Life 50,000 Hrs. (L<sub>70</sub> B<sub>50</sub>) at T<sub>[A]</sub> 25°C Max. •
- "Equivalent" ÷ Comparable Equivalence to Metal Halide (MH) Lamp & Fixtures