




Modular Wall Wash LED Fixture

**350W LED Luminaires for
Commercial & Industrial Buildings
IP65 Dust & Water Proof**

Features & Benefits:

- Great Energy Savings !
- Directive NF/MF/WF Beam Angle
- 5-Years | 50,000 Hours Warranty(*)
- High Power Factor – UL Listed Driver
- Bright – High CRI – High Lumen Output
- Built-in Surge Suppressors & Protection
- CCT 5500K, 4000K, 3000K for MH & HPS Replacement

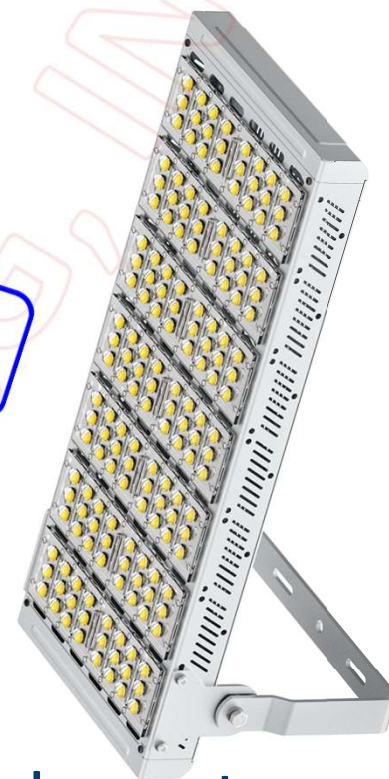

40° / 90° / 150°x80° Beam Angle available on request

IP65 ≈ NEMA Enclosure Rating 4



Model	Product	Size	Power	Flux	Equivalent
MFL-350W-30K-WF-277V MFL-350W-30K-WF-480V	Modular Wall Wash LED Fixture 350W 3000K 150°x80° 277/480Vac	(L) 28 ⁵ / ₈ "	350W Max	52,500 Lumen	1,500W MH Lamp
MFL-350W-40K-WF-277V MFL-350W-40K-WF-480V	Modular Wall Wash LED Fixture 350W 4000K 150°x80° 277/480Vac	(W) 12 ¹ / ₈ "	350W Max	52,500 Lumen	1,500W MH Lamp
MFL-350W-55K-WF-277V MFL-350W-55K-WF-480V	Modular Wall Wash LED Fixture 350W 5500K 150°x80° 277/480Vac	(H) 3 ¹ / ₄ "	350W Max	52,500 Lumen	1,500W MH Lamp

- "277V": 120-277Vac or "480V": 208-480Vac ~50/60Hz • P.F. > 0.9 • 3ft. Cable/Loose Leads Wires • THD <20% •
- CCT 5500K (55K), 4000K (40K), 3000K (30K) ±10% • CRI > 70 • ~150 lm/W •
- "NF" Narrow Flood 40°, "MF" Medium Flood 90°, "WF" Wide Flood 150°x80° •
- (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_[A] 25°C Max. •
- "Equivalent" ÷ Comparable Equivalence to Metal Halide (MH) Lamp & Fixtures