

# 65W LED Retrofit Kits

**Suitable for Outdoor Pole/Arm-Mounted Area  
and Roadway Luminaires.**

## Features & Benefits:

- Low THD •
- Bright • High CRI •
- 5-Years / 50,000 Hours (\*) Warranty •
- High Power Factor UL Listed LED Driver •
- Built-in Surge Suppressors & Transient Protection •



Model	Product	Size	Power	Flux	Equivalent
LRK-65W-57KC	65W 5,700K LED Retrofit Kit	LED Engine (L) 4¾" (W) 4¾" (D) 3"	56W	8,400 Lumen	250W MH or HPS




- Rated Voltage: 120-277Vac ~50/60Hz • P.F. > 0.9 • >130lm/W • CRI ≈ 70 •
- (\*) Rated Life 50,000 Hrs. (L<sub>70</sub> B<sub>50</sub>) at T<sub>A</sub> 25°C Max. • Beam Angle 90° •
- Pigtail Wire/Cable LED Driver to Mains •



Smart LED Lighting

# 65W

## LED Retrofit Kits

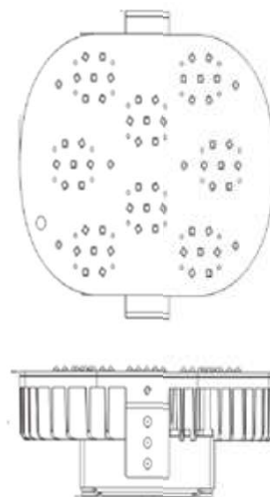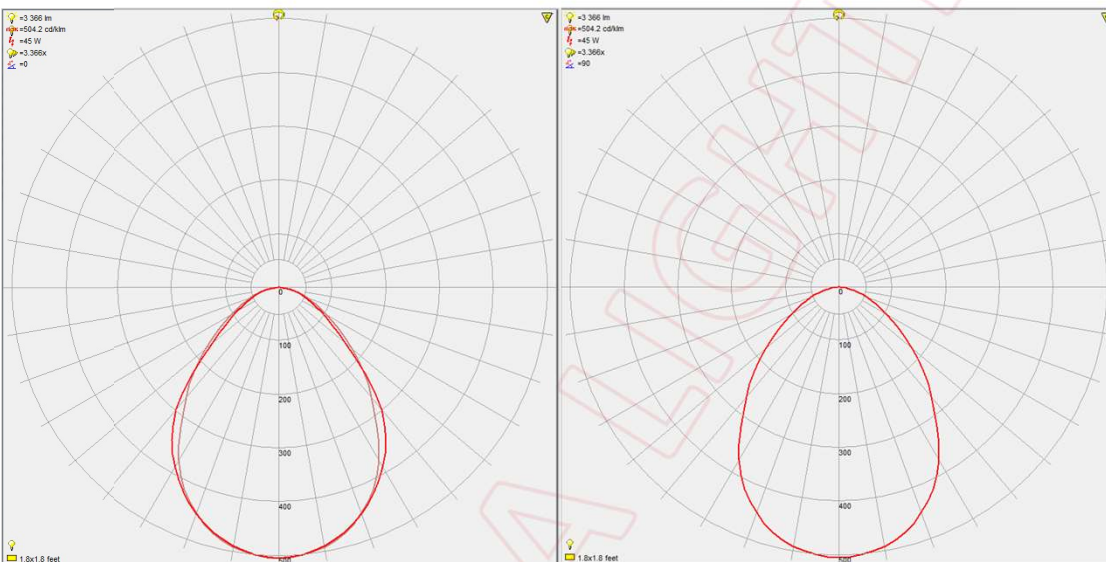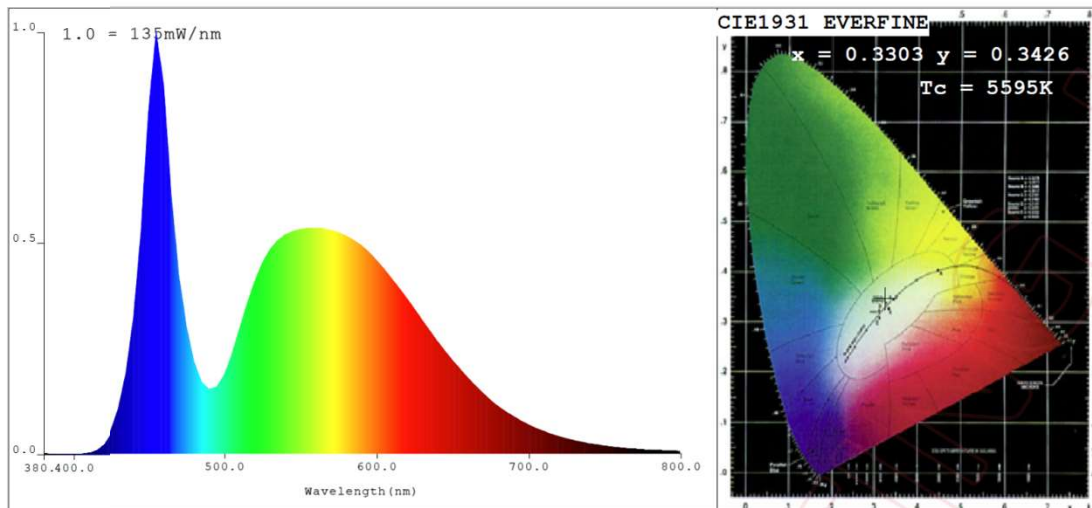

Size / Dimensions  
**LED Engine**  
(L) 4¾" (W) 4¾"  
(D) 3"

Model	Product	Power	Equivalent
LRK-65W-57KC	65W 5,700K LED Retrofit Kit	56W	250W MH &/or HPS Lamp
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	56W Max. P.F. > 0.9	>130 lm/W	8,400 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI ≈ 70	5,700K CCT ±10%	90°	50,000 Hours (L <sub>70</sub> B <sub>50</sub> ) T <sub>[A]</sub> 25°C Max.