


Suitable for Outdoor Pole/Arm-Mounted Area and Roadway Luminaires.

Features & Benefits:

- Low THD •
- Bright • High CRI •
- 5-Years / 50,000 Hours (*) Warranty •
- High Power Factor UL Listed LED Driver •
- Built-in Surge Suppressors & Transient Protection •



Cree® XLamp® XT-E LEDs



Model	Product	Size	Power	Flux	Equivalent
LRK-65W-57K-480V	65W 5,700K LED Retrofit Kit	LED Engine (L) 6 ⁷ / ₈ " (W) 5" (D) 2 ¹ / ₈ "	65W	8,400 Lumen	250W MH or HPS

- Rated Voltage: 200-480Vac ~50/60Hz • P.F. > 0.9 • >130lm/W • CRI ≈ 70 •
- (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. • Beam Angle 90° •
- Pigtail Wire/Cable LED Driver to Mains •






Smart LED Lighting

65W



LED Retrofit Kits

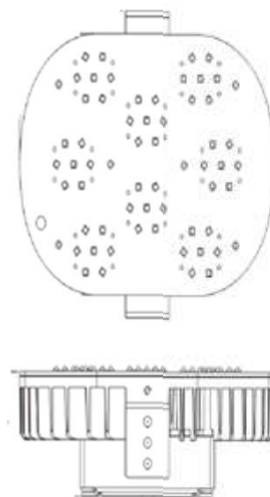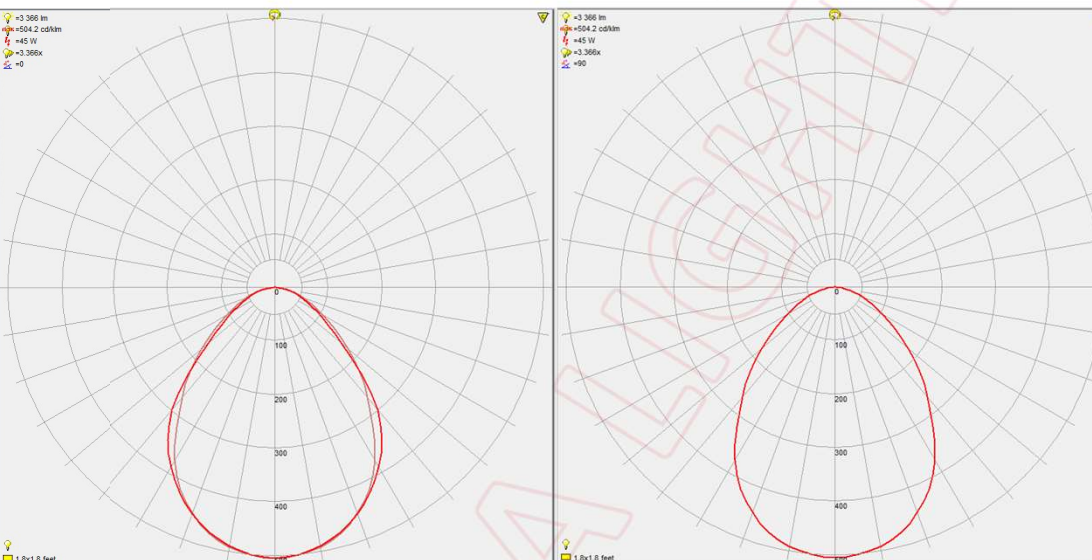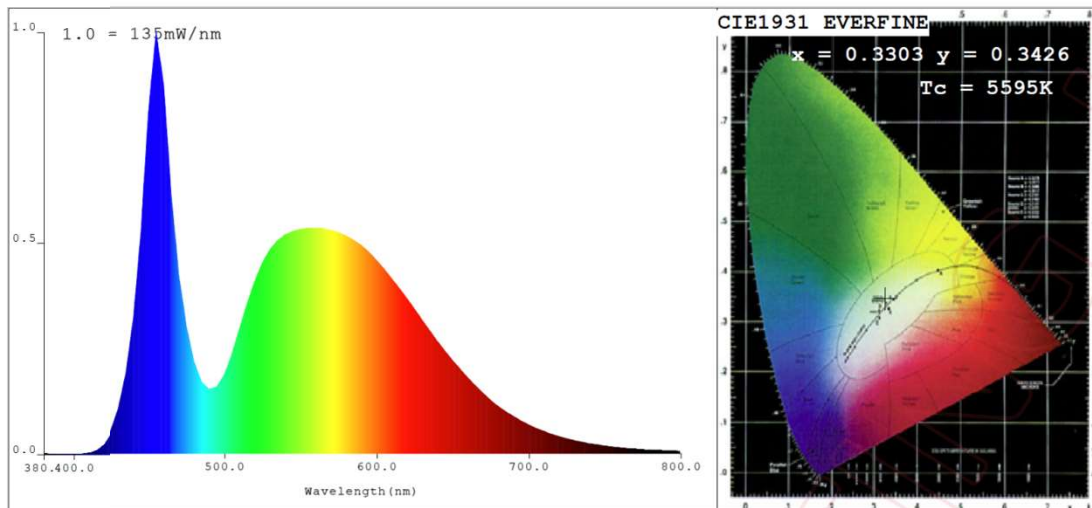

Size / Dimensions
LED Engine
(L) 6 $\frac{7}{8}$ " (W) 5"
(D) 2 $\frac{1}{8}$ "

Model	Product	Power	Equivalent
LRK-65W-57K-480V	65W 5,700K LED Retrofit Kit	65W	250W MH &/or HPS Lamp
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	65W Max. P.F. > 0.9	>130 lm/W	8,400 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI $\approx$ 70	5,700K CCT $\pm$ 10%	90°	50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.