



Smart LED Lighting



Metal Halide & High-Pressure Sodium Compact 25W LED Replacement Lamp

- Rated Life 50,000 Hours (★) •
- High Power Factor • Self Ballasted •
- Suitable for Open & Enclosed Fixtures •
- Bright • High CRI • High Lumen Output •
- Built-in Surge Suppressors & Protection •



Available in:

CCT 5,500K $\pm 10\%$ (CW) for MH Replacement
CCT 3,000K $\pm 10\%$ (WW) for HPS Replacement

- Simple Installation • High Lumen per Watt • Rugged Design •



Model	Product	Size	Power	Flux	Equivalent
CCL-25W12-55K-E26	Compact Cluster LED Bulb 25W 5500K E26	$\varnothing 2\frac{3}{4}"$ L $6\frac{3}{4}"$	26W Max.	4,300 Lumen	150W Incand. 100W MH
CCL-25W12-30K-E26	Compact Cluster LED Bulb 25W 3000K E26	$\varnothing 70\text{mm}$ L 171mm	26W Max.	4,100 Lumen	150W Incand. 100W HPS
CCL-25W12-55K-E39	Compact Cluster LED Bulb 25W 5500K E39	$\varnothing 2\frac{3}{4}"$ L 7"	26W Max.	4,300 Lumen	150W Incand. 100W MH
CCL-25W12-30K-E39	Compact Cluster LED Bulb 25W 3000K E39	$\varnothing 70\text{mm}$ L 178mm	26W Max.	4,100 Lumen	150W Incand. 100W HPS



- 120-277Vac $\sim 50/60\text{Hz}$ • PF > 0.9 • Med. (E26) or Mogul (E39) Lamp Base • $\sim 165\text{ lm/W}$ • CRI > 75 •
- (★) Rated Life 50,000 Hrs. ($L_{70} B_{50}$) at $T_{[A]}$ 25°C Max. • CCT 5500K (55K) or 3000K (30K) $\pm 10\%$ •




Smart LED Lighting





Compact 25W Cluster LED Lamp

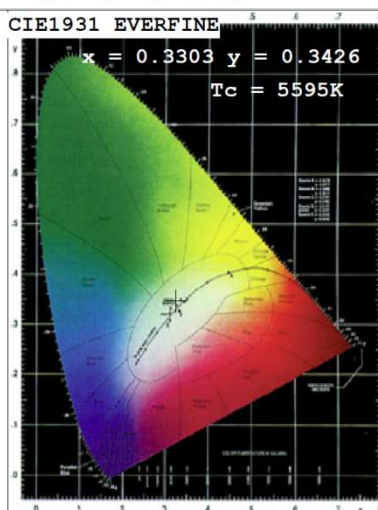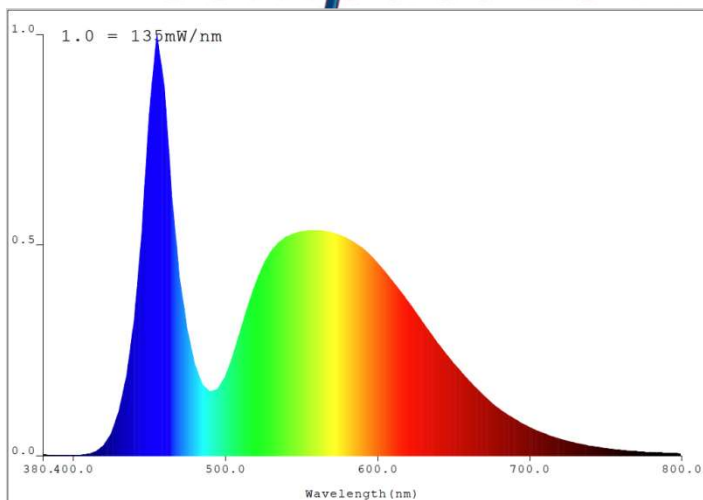

Distribution Curve of Meridian

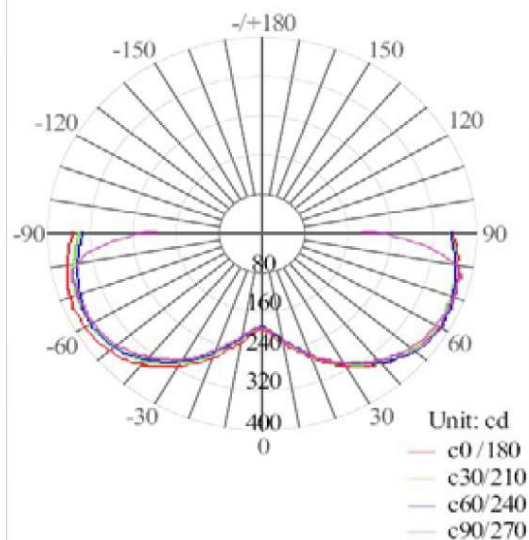

Conical Intensity Distribution Curve of Max Intensity

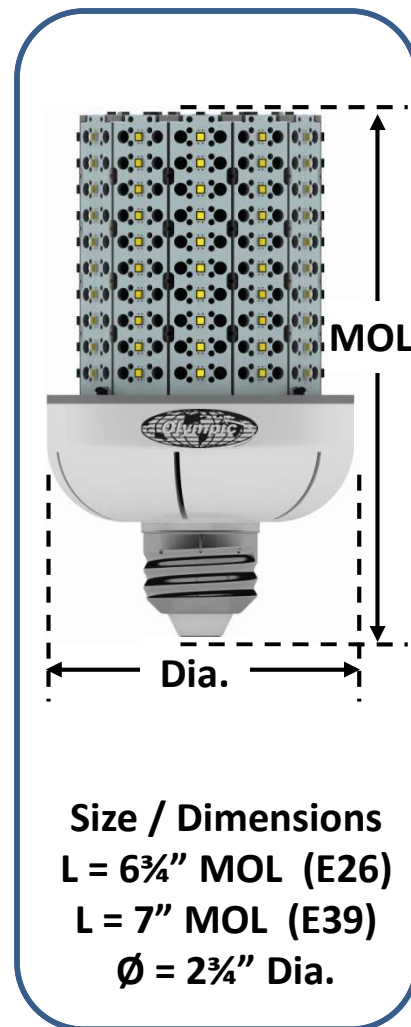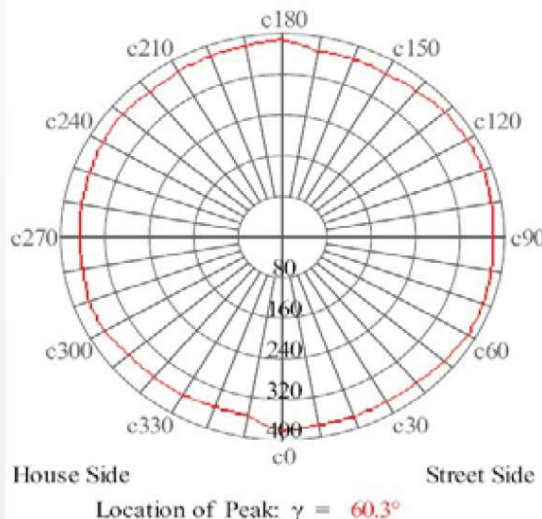

Size / Dimensions
L = 6¾" MOL (E26)
L = 7" MOL (E39)
Ø = 2¾" Dia.

Model	Product	Power	Equivalent
CCL-25W12-ccK-Enn	Cluster LED Bulb	26W	100W MH/HPS
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	26W Max. P.F. ≈ 0.97	~165 lm/W	4,300 Lumen (CW) 4,100 Lumen (WW)
Color Rendering	Color Temperature	Beam Angle	Life
CRI ÷ 75~80	30K ÷ CCT 3,000K ±10% 55K ÷ CCT 5,500K ±10%	360°	5-Years / 50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.