



Smart LED Lighting



Metal Halide & High Pressure Sodium 40W LED Replacement Lamp

ETL Certified for Compliance
to UL1598C and UL1993

- High Power Factor • Self Ballasted •
- 5-Years / 50,000 Hours Warranty (*) •
- Suitable for Open & Enclosed Fixtures •
- Bright • High CRI • High Lumen Output •
- Built-in Surge Suppressors & Protection •



Available in:

CCT 5500K $\pm 10\%$ (CW) for MH Replacement
CCT 4000K $\pm 10\%$ (NW) for MH Replacement
CCT 3000K $\pm 10\%$ (WW) for HPS Replacement

US Patent D762,884S
D782.081S, D782082S

- Simple Installation • High Lumen per Watt • Rugged Design • Ballast By-Pass UL Type B •






Model	Product	Size	Power	Flux	Equivalent
CL-40W8-55K-E26	LED Lamp 40W 360° 55K MH Replacement	Ø3½ x 6⅝"	41W Max.	7,200 Lumen	175W HPS/MH
CL-40W8-30K-E26	LED Lamp 40W 360° 30K HPS Replacement	Ø3½ x 6⅝"	41W Max.	7,200 Lumen	175W HPS/MH
CL-40W8-55K-E39	LED Lamp 40W 360° 55K MH Replacement	Ø3½ x 6½"	41W Max.	7,200 Lumen	175W HPS/MH
CL-40W8-30K-E39	LED Lamp 40W 360° 30K HPS Replacement	Ø3½ x 6½"	41W Max.	7,200 Lumen	175W HPS/MH

- 120-277Vac ~50/60Hz • PF > 0.9 • Med. (E26) or Mogul (E39) Lamp Base • ~180 lm/W • CRI > 75 •
- (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C • CCT 3000K (30K), 4000K (40K), 5500K (55K) $\pm 10\%$ •



Smart LED Lighting

40W Cluster LED Lamp

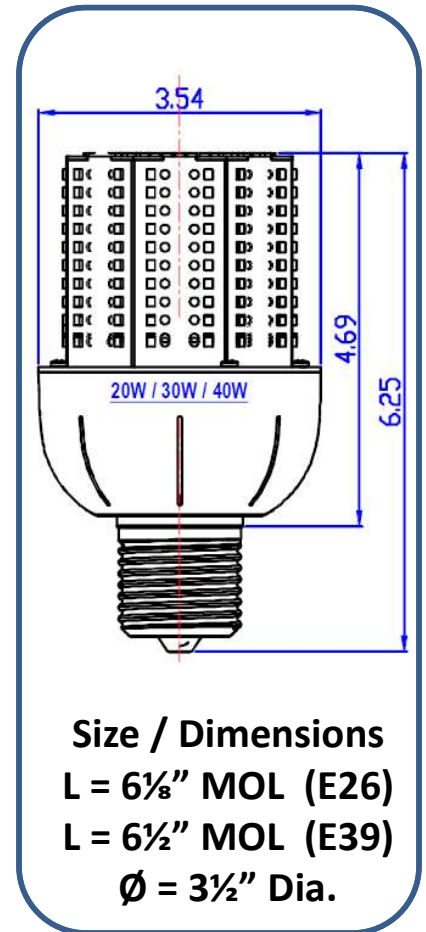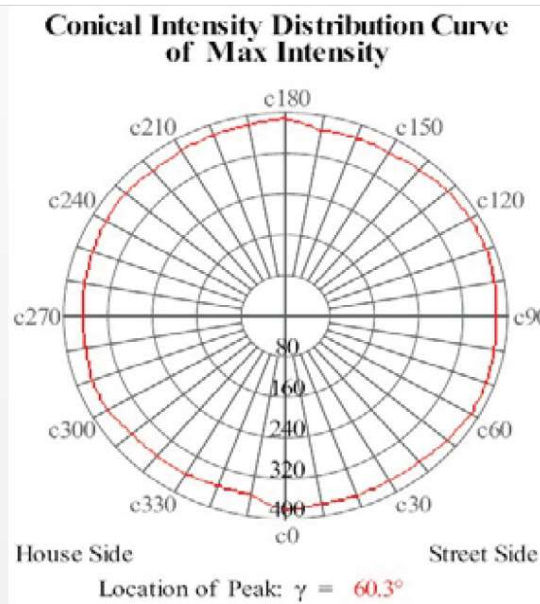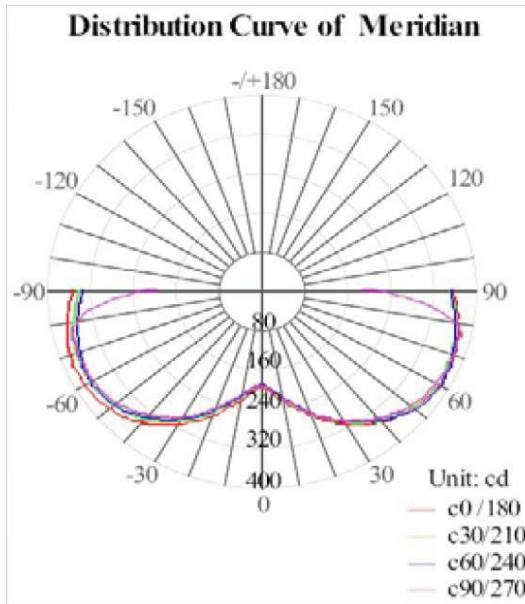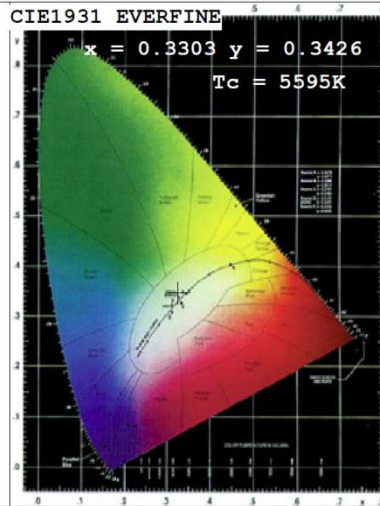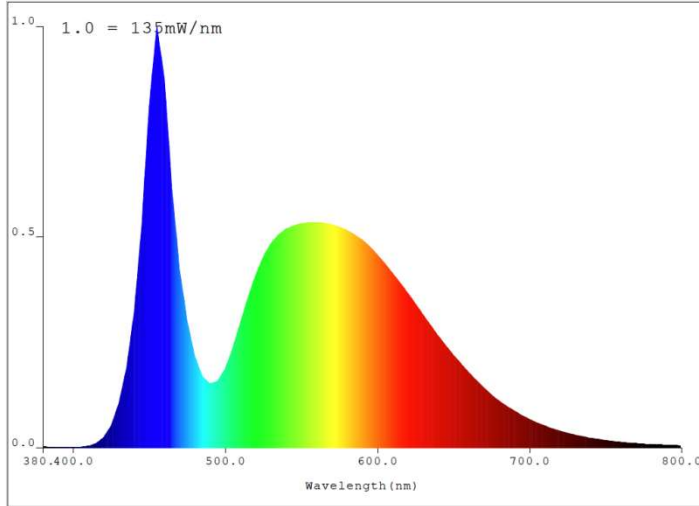

Model	Product	Power	Equivalent
CL-40W8-ccK-Enn	Cluster LED Bulb	41W	175W MH/HPS
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	41W Max. P.F. ≈ 0.97	~180 lm/W	7,200 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI ÷ 75~80	CCT 5500K, 4000K, 3000K ±10%	360°	5-Years / 50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.