



Smart LED Lighting



4 ft. 16W T8 LED Tubes

T8 & T12 Fluorescent Replacements

Dual Mode Internal Driver (UL Type A + B)

Features & Benefits:

- Flicker Free Lighting •
- Low Temp. Instant Start •
- Shatter Proof, PC+Alum. Design •
- Ballast Compatible or Direct Wire •
- Low Energy, High Lumen per Watt •
- 5-Years | 50,000 Hours Warranty (*) •
- Adjustable CCT 3000K, 4000K, 5000K •



Model	Product	Size	Power	Flux	Equivalent
F32T8D-16W-50K-DBD DLC ID: S-Q4DQPH	T8 LED Tube 4ft 16W 5000K Frosted	4ft. T8 Ø 1" x L 48"	16W Typ.	2,080 Lumen	F32T8/12 28W & 32W
F32T8D-16W-40K-DBD DLC ID: S-Q4DQPH	T8 LED Tube 4ft 16W 4000K Frosted	4ft. T8 Ø 1" x L 48"	16W Typ.	2,080 Lumen	F32T8/12 28W & 32W
F32T8D-16W-30K-DBD DLC ID: S-Q4DQPH	T8 LED Tube 4ft 16W 3000K Frosted	4ft. T8 Ø 1" x L 48"	16W Typ.	1,955 Lumen	F32T8/12 28W & 32W


- 120~277Vac ~50/60Hz • P.F. > 0.9 • THD <20% • Medium Bi-pin Base (G13) • Efficacy >130lm/W • CRI >80 •
- (*) Rated Life > 50,000 Hrs. (L₇₀ B₅₀) at T_A 45°C Max. • CCT 5000K (50K), 4000K (40K) or 3000K (30K) ±10% •
- "Equivalent." ÷ Comparable Equivalence to Fluorescent T8/T12 Wattage •




Smart LED Lighting



4 ft. 16W T8 LED Tubes

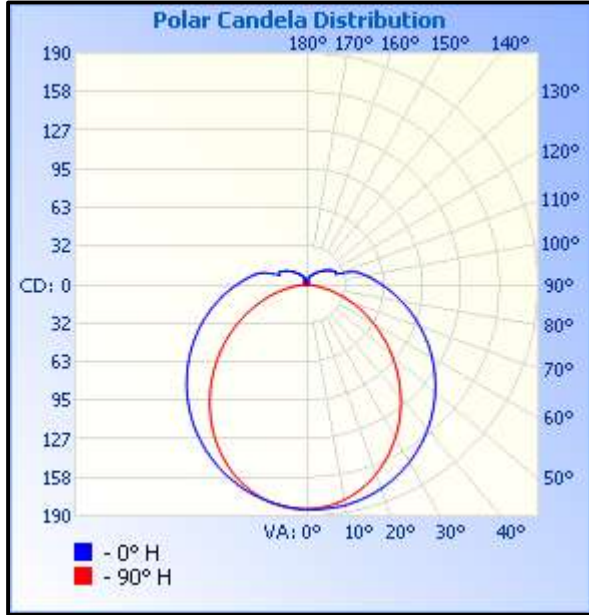

4FT T8 LED Bulbs

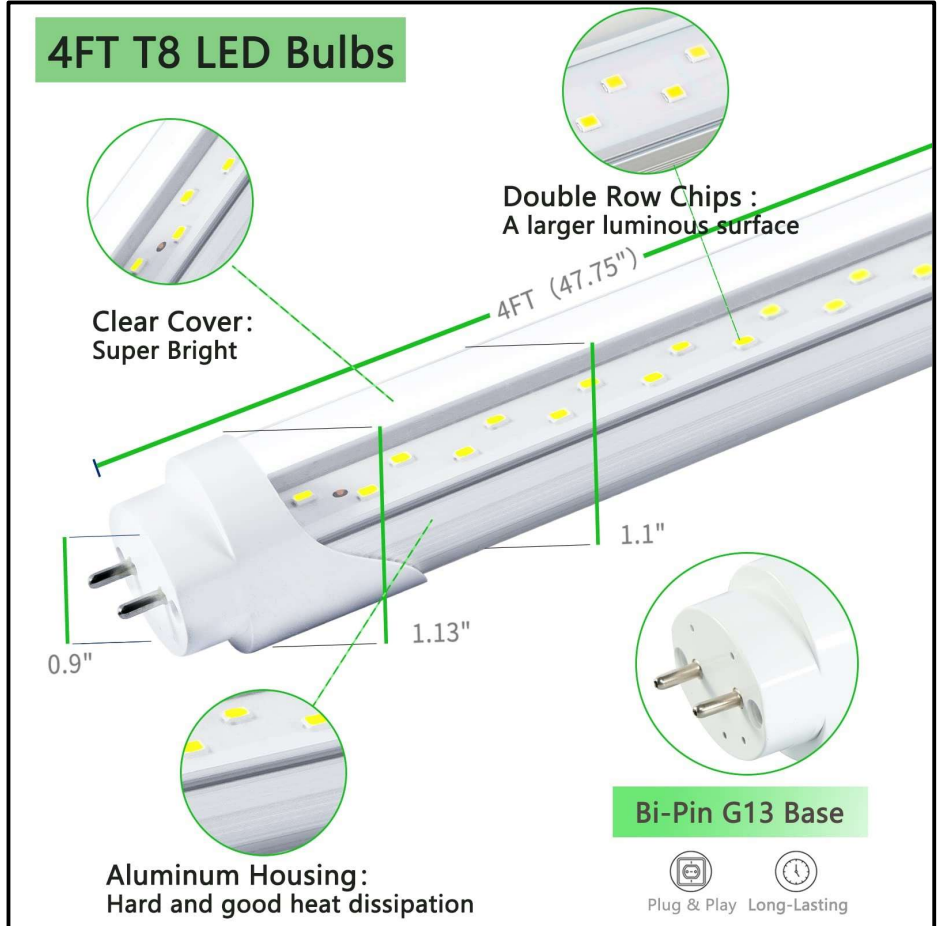

Model	Product	Power	Equivalent
F32T8D-16W-30K-DBD F32T8D-16W-40K-DBD F32T8D-16W-50K-DBD	T8 LED Tube 4ft 16W Frosted CCT 30K-40K-50K	16W Typ.	F32T8 4FT T8 Tube
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	16W P.F. $\approx$ 0.97	$\sim$ 130 Lm/W	2,080 Lumens
Color Rendering	Color Temperature	Beam Angle	Life
CRI $\sim$ 83	3000K, 4000K, 5000K $\pm$ 10%	150°	5-Years / 50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.