



Smart LED Lighting



120W Slim Hi-Bay LED Lamp

Features & Benefits:

- Great Energy Savings ! •
- Directive 60°/90° Beam Angle •
- 5-Years | 50,000 Hours Warranty (★) •
- High Power Factor – UL Listed Driver •
- Bright – High CRI – High Lumen Output •
- Built-in Surge Suppressors & Protection •
- CCT 5,500K ideal for MH Lamps Replacement •



US Patent D907,257S



Model	Product	Size	Power	Flux	Equivalent
HBL-120W-ccK-E39-60d	Slim High-Bay LED Lamp 120W 55K E39 277V 60°	Ø 11" (dia.) x L 8" (MOL)	120W Max	16,800 Lumen	600W MH Lamp
HBL-120W ^H -ccK-E39-60d	Slim High-Bay LED Lamp 120W 55K E39 480V 60°	Ø 11" (dia.) x L 8½" (MOL)	120W Max	16,800 Lumen	600W MH Lamp




- 120-277Vac / "H": 208-480Vac ~50/60Hz • PF > 0.9 • THD < 20% • Mogul (E39/E40) Lamp Base •
- 140 lm/W • CRI 75 • CCT 3,000K or 5,500K ±10% • (★) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. •



Smart LED Lighting





120W High-Bay LED Lamp

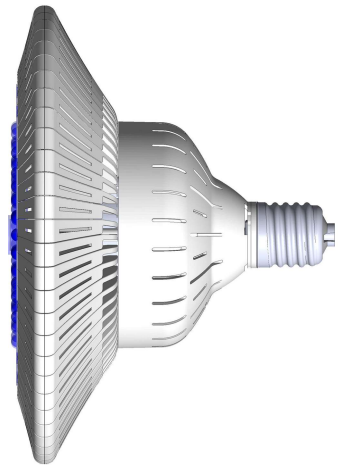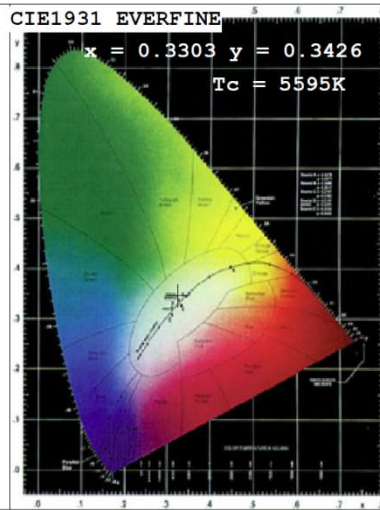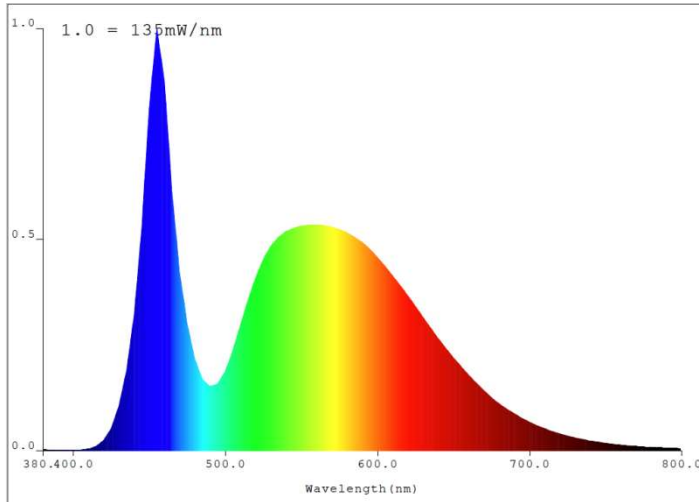

US Patent D907,257S

Size / Dimensions
 Ø 11" (dia.)
 L 8½" (MOL)

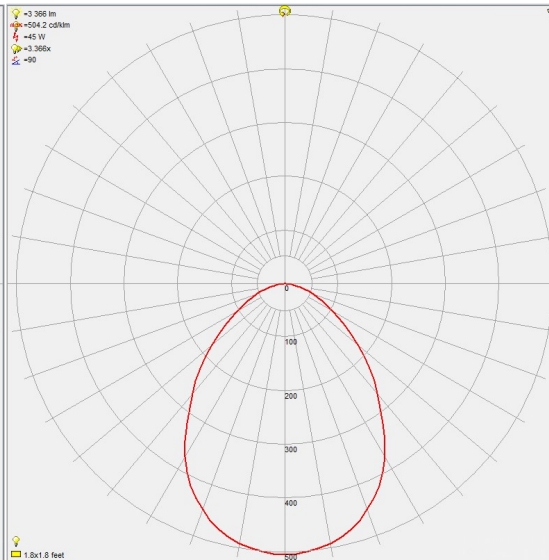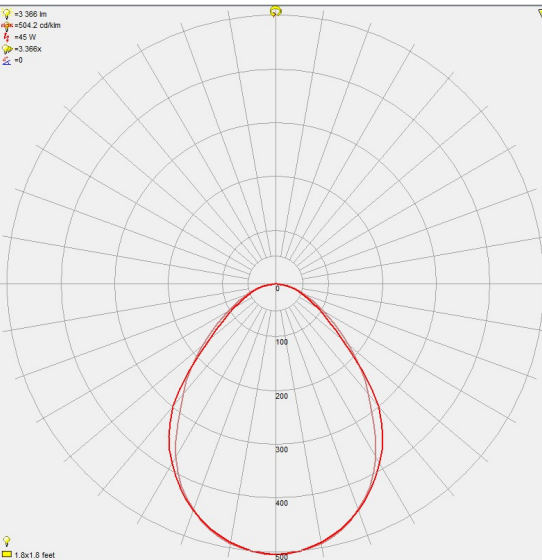

Model	Product	Power	Equivalent
HBL-120W-ccK-E39-60d	High-Bay LED Lamp 120W 60°	120W	600W MH &/or HPS Lamp
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	120W Max. P.F. ≈ 0.97	~140 lm/W	16,800 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI ÷ 75~80	3000K, 4000K, 5500K CCT ±10%	60°-90° Option	5-Years / 50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.