



Smart LED Lighting



150W Slim Hi-Bay LED Lamp

Features & Benefits:

- Great Energy Savings ! •
- Directive 60°/90° Beam Angle •
- 5-Years | 50,000 Hours Warranty (★) •
- High Power Factor – UL Listed Driver •
- Bright – High CRI – High Lumen Output •
- Built-in Surge Suppressors & Protection •
- CCT 5,500K ideal for MH Lamps Replacement •



US Patent D907,257S



Model	Product	Size	Power	Flux	Equivalent
HBL-150W-ccK-E39-60d	Slim High-Bay LED Lamp 150W 55K E39 277V 60°	(Ø 12¾" (dia.) x L 8" (MOL)	150W Max	21,000 Lumen	800W MH Lamp
HBL-150W ^H -ccK-E39-60d	Slim High-Bay LED Lamp 150W 55K E39 480V 60°	Ø 12¾" (dia.) x L 8½" (MOL)	150W Max	21,000 Lumen	800W MH Lamp






- 120-277Vac / "H": 208-480Vac ~50/60Hz • PF > 0.9 • THD < 20% • Mogul (E39/E40) Lamp Base •
- 140 lm/W • CRI 75 • CCT 3,000K or 5,500K ±10% • (★) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. •



Smart LED Lighting



150W High-Bay LED Lamp

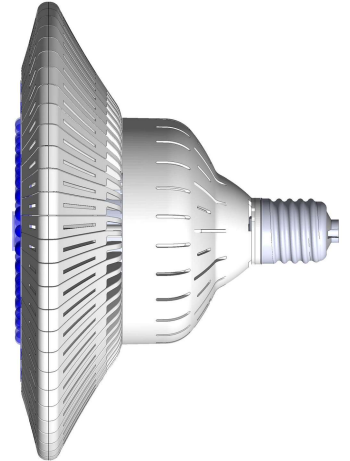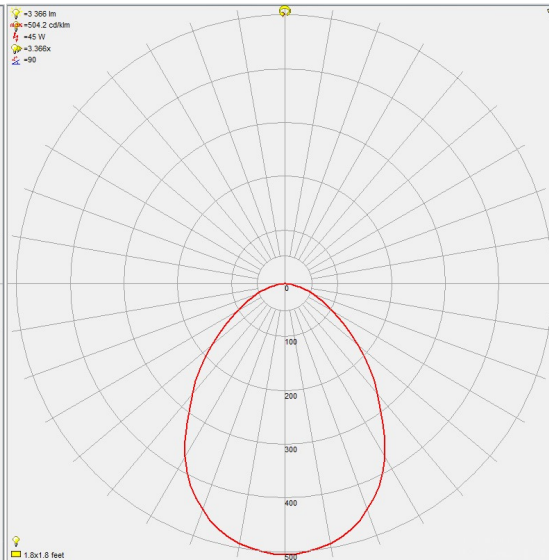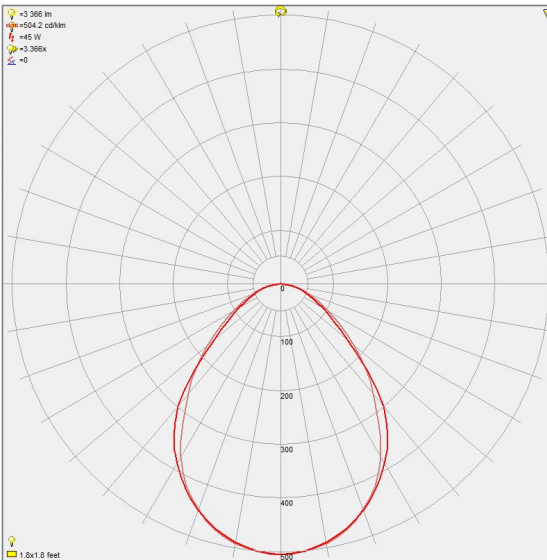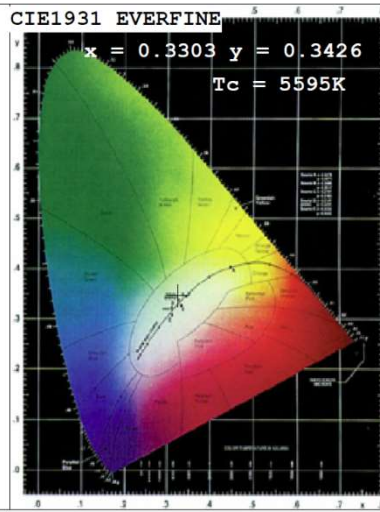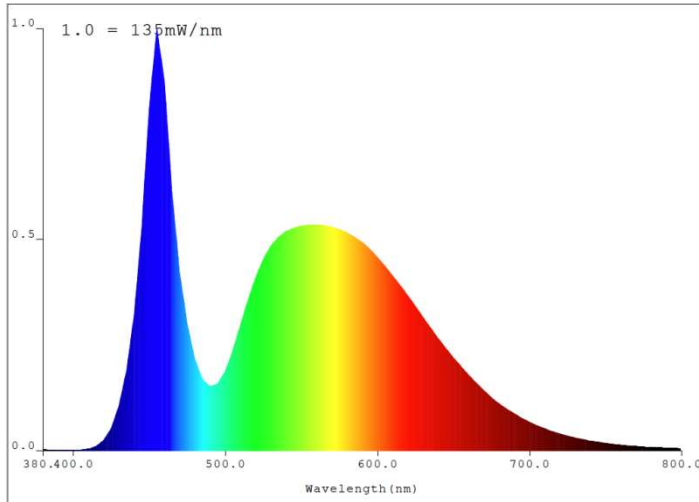

US Patent D907,257S

Size / Dimensions
 $\varnothing$ 12 $\frac{3}{4}$ " (dia.)
 L 8 $\frac{1}{2}$ " (MOL)

Model	Product	Power	Equivalent
HBL-150W-ccK-E39-60d	High-Bay LED Lamp 150W 60°	150W	800W MH &/or HPS Lamp
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	150W Max. P.F. $\approx$ 0.97	$\sim$ 140 lm/W	21,000 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI $\div$ 75~80	3000K, 4000K, 5500K CCT $\pm$ 10%	60°-90° Option	5-Years / 50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.