



Smart LED Lighting



# 200W High-Bay LED Lamp

## Replacement for 1,500W HID Lamps

### Features & Benefits:

- Great Energy Savings ! •
- Directive 30° Beam Angle (♣) •
- 5-Years / 50,000 Hours Warranty (★) •
- Bright – High CRI – High Lumen Output •
- Built-in Surge Suppressors & Protection •
- CCT 5,500K for MH or 3,000K for HPS Lamps •
- High Power Factor – Low THD – Self Ballasted •



US Patent D907,257S



(♣) 45° - 60° - 120° Beam Angle Options available on request  
Olympia Lighting proprietary ! Design registration Patent pending





| Model                              | Product                                | Size             | Power       | Flux            | Equivalent          |
|------------------------------------|----------------------------------------|------------------|-------------|-----------------|---------------------|
| HBL-200W-ccK-E39-30d               | Hi-Bay LED Lamp<br>200W 60-LED 55K 30° | Ø (dia.)<br>12¾" | 200W<br>Max | 28,000<br>Lumen | 1,000W<br>MH        |
| HBL-200W <sup>H</sup> -ccK-E39-30d | Hi-Bay LED Lamp<br>200W 60-LED 55K 30° | x<br>MOL<br>8½"  | 200W<br>Max | 28,000<br>Lumen | 1,000W<br>MH or HPS |

- 120-277Vac / "H":208-480Vac ~50/60Hz • PF > 0.9 • THD <20% • Mogul (E39/E40) Lamp Base • ~140 lm/W • CRI >75 •
- (\*) Rated Life 50,000 Hrs. (L<sub>70</sub> B<sub>50</sub>) at T<sub>A</sub> 25°C Max. • CCT 5500K (55K), 4000K (40K) or 3000K (30K) ±10% •
- "Equivalent" ÷ Comparable Equivalence to Metal Halide (MH) &/or High Pressure Sodium (HPS) Lamps



Smart LED Lighting

# 200W High-Bay LED Lamp

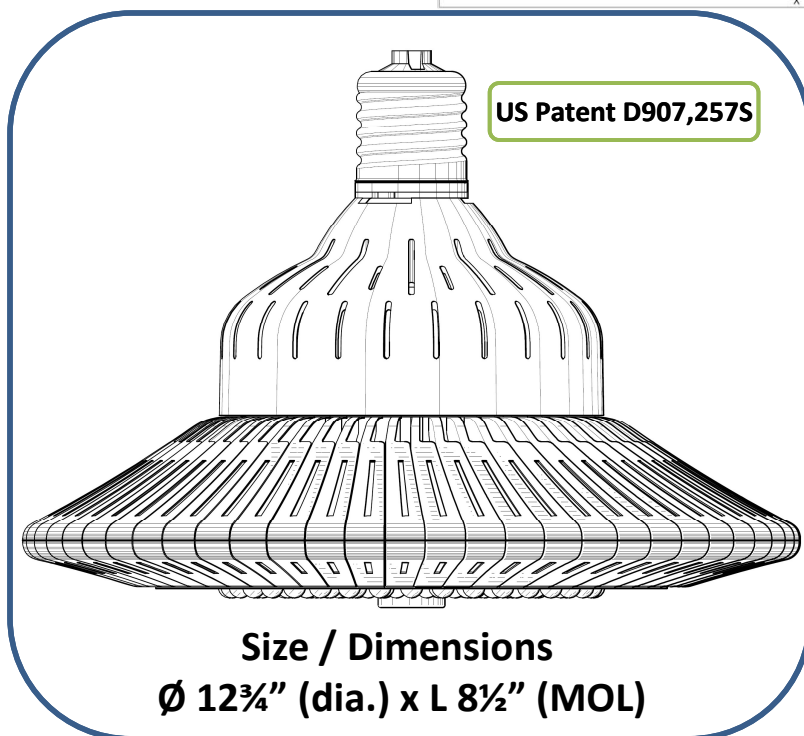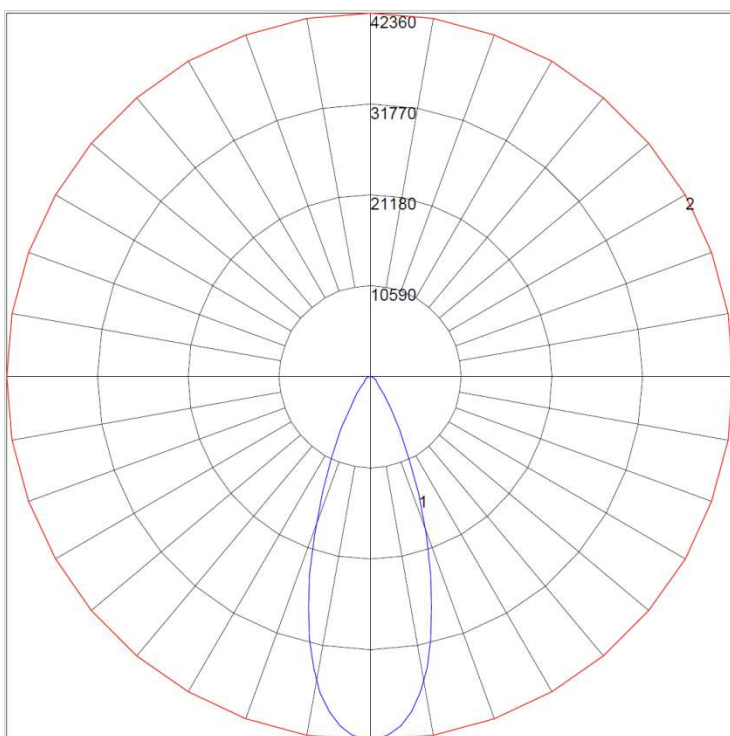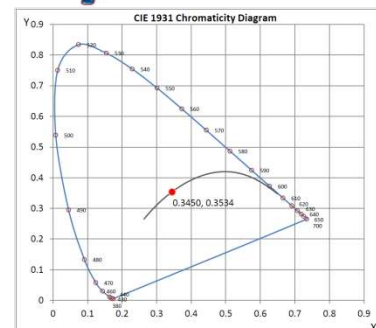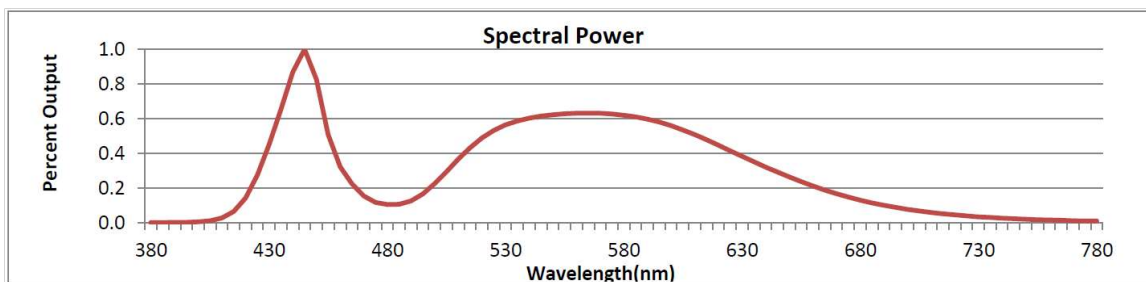

| Model                                         | Product                                 | Power                       | Equivalent                                                                              |
|-----------------------------------------------|-----------------------------------------|-----------------------------|-----------------------------------------------------------------------------------------|
| HBL-200W-ccK-E39-30d                          | High-Bay LED Lamp<br>200W 60-LED 30°    | 200W<br>Max.                | 1,000W<br>MH &/or HPS Lamp                                                              |
| Input Voltage                                 | Power Factor / THD                      | Efficacy                    | Flux                                                                                    |
| 120-277Vac ~50/60Hz<br>H: 208-480Vac ~50/60Hz | P.F. $\approx$ 0.97<br>THD $\approx$ 8% | $\sim$ 140 lm/W             | 28,000 Lumen                                                                            |
| Color Rendering                               | Color Temperature                       | Beam Angle                  | Life                                                                                    |
| CRI $\div$ 75~80                              | 3000K, 4000K, 5500K<br>CCT $\pm$ 10%    | 30°-45°-60°-<br>120° Option | 5-Years / 50,000 Hours<br>(L <sub>70</sub> B <sub>50</sub> ) T <sub>[A]</sub> 25°C Max. |