



Smart LED Lighting



350W Stadium LED Lamp

Replacement for 1,500W HID Lamps

External LED Driver

Features & Benefits:

- Great Energy Savings ! •
- Directive 30° Beam Angle (♣) •
- Flicker Free Built-in LED Driver •
- 5-Years / 50,000 Hours Warranty (★) •
- Bright – High CRI – High Lumen Output •
- Built-in Surge Suppressors & Protection •
- High Power Factor – Low THD – Self Ballasted •



US Patent D907,257S



(♣) 45° - 60° - 120° Beam Angle - Options available on request

Model	Product	Size	Power	Flux	HID
HBL-350W X -ccK-E39-45d	High-Bay LED Lamp 350W 55K E39 277V 45°	(dia.) 14 $\frac{3}{8}$ "	350W Max	49,000 Lumen	1,500W MH Lamp
HBL-350W XH -ccK-E39-45d	High-Bay LED Lamp 350W 40K E39 480V 45°	x (H) 9 $\frac{7}{8}$ "	350W Max	49,000 Lumen	1,500W MH Lamp





- 120-277Vac or "**H**" = 208-480Vac ~50/60Hz • PF > 0.9 • THD <20% • Mogul (E39) Lamp Base •
- (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_[A] 25°C Max. • CCT 55K = 5500K ±10% • ~140 lm/W • CRI >75 •
- "**X**" External Driver • Optional CCT on request: 40K = 4000K, or 30K = 3000K ±10% •
- "HID" ÷ Comparable Equivalence to Metal Halide (MH) &/or High Pressure Sodium (HPS) Lamps



Smart LED Lighting



350W Stadium LED Lamp

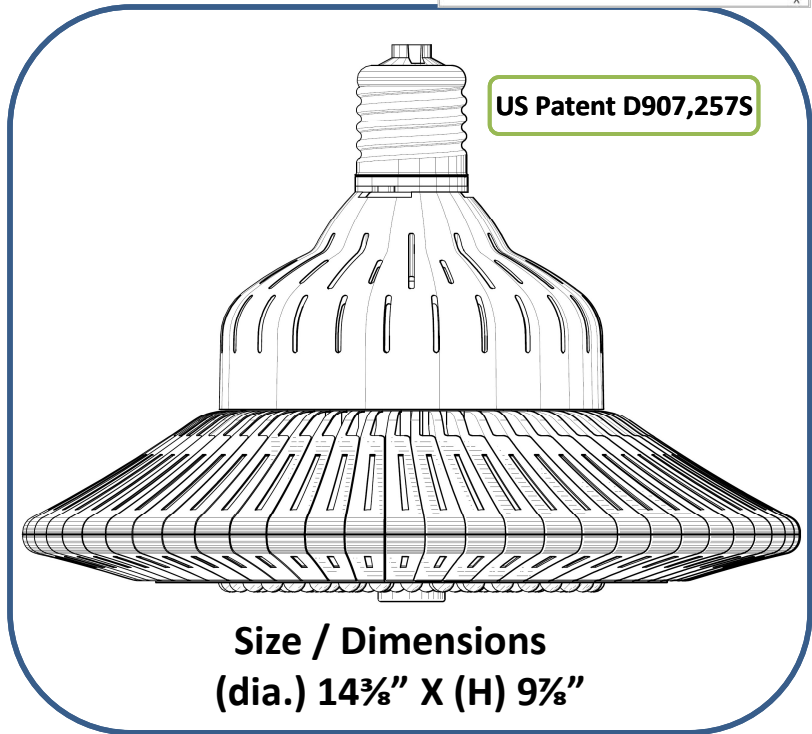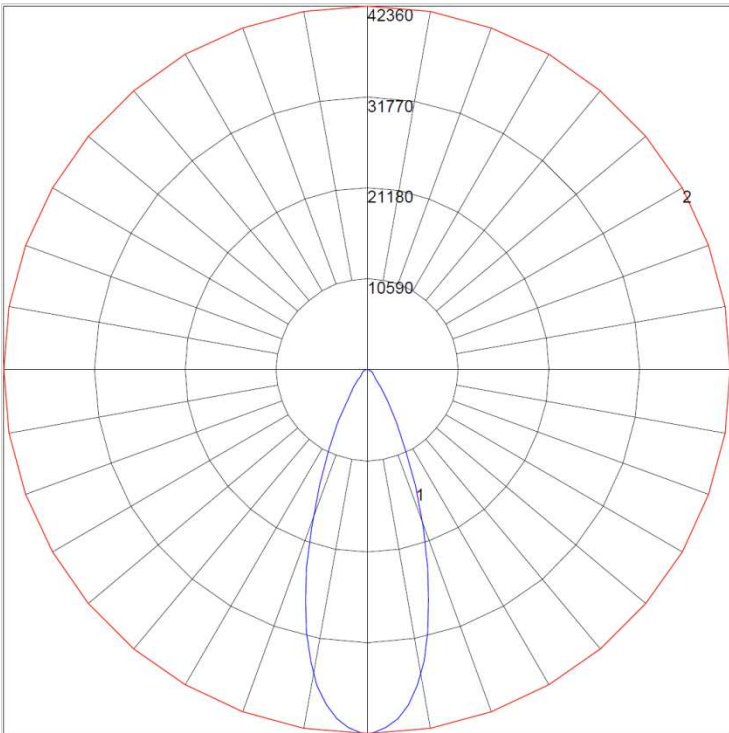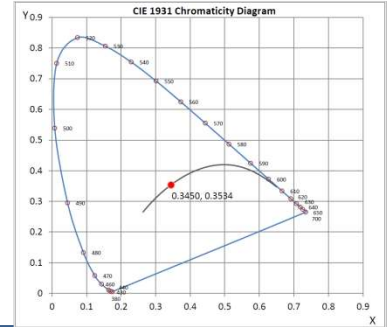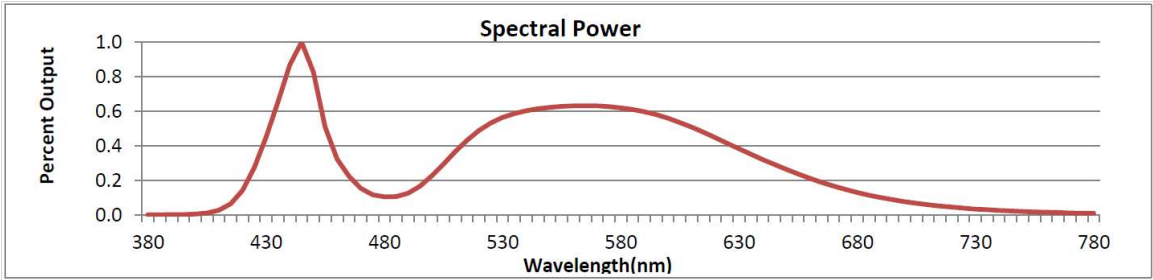

Model	Product	Power	Equivalent
HBL-350W X -ccK-E39-45d HBL-350W H -ccK-E39-45d	High-Bay LED Lamp 350W 45°	350W Max.	1,500W MH &/or HPS Lamp
Input Voltage	Power Factor / THD	Efficacy	Flux
120-277Vac ~50/60Hz H: 208-480Vac ~50/60Hz	P.F. ≈ 0.97 THD ≈ 8%	~140 lm/W	49,000 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI ÷ 75~80	3000K, 4000K, 5500K CCT ±10%	30°-45°-60°- 120° Option	5-Years / 50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.