

200W / 240W LED Retrofit Kits


**Suitable for Outdoor Pole/Arm-Mounted Area
and Roadway Luminaires.**

Features & Benefits:

- Low THD •
- Bright • High CRI •
- 5-Years / 50,000 Hours (*) Warranty •
- High Power Factor UL Listed LED Driver •
- Built-in Surge Suppressors & Transient Protection •



Cree® XLamp® XT-E LEDs








Model	Product	Size	Power	Flux	Equivalent
LRK-200W-57K-277V	200W 5,700K LED Retrofit Kit	LED Engine (L) 9¼" (W) 6¼" (D) 3½"	240W	31,200 Lumen	600W/1000W MH or HPS
LRK-240W-57K-480V	240W 5,700K LED Retrofit Kit 480V	LED Engine (L) 9¼" (W) 6¼" (D) 3½"	241W	31,200 Lumen	600W/1000W MH or HPS

• Rated Voltage: 120-277Vac / 208-480Vac ~50/60Hz • P.F. > 0.9 • >130lm/W • CRI ≈ 70 •
•(*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. • Beam Angle 90° • Pigtail Wire/Cable LED Driver to Mains •



Smart LED Lighting

200W / 240W LED Retrofit Kits

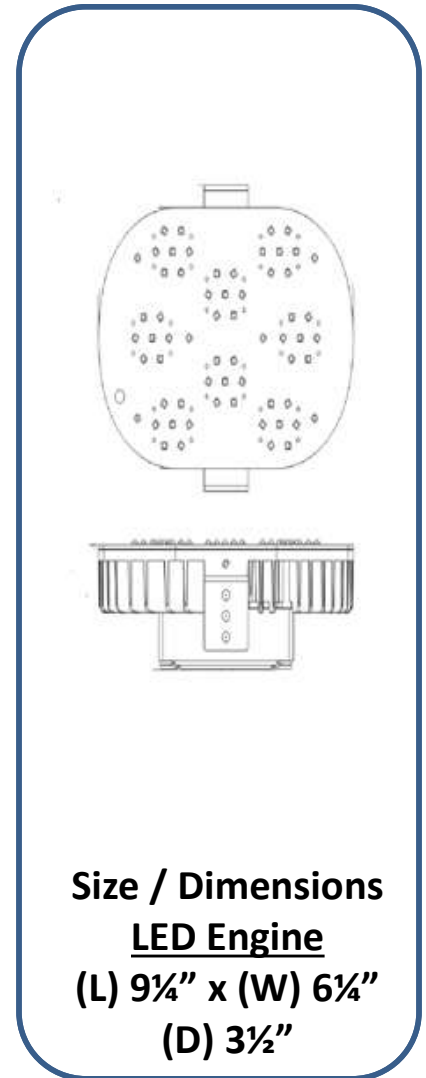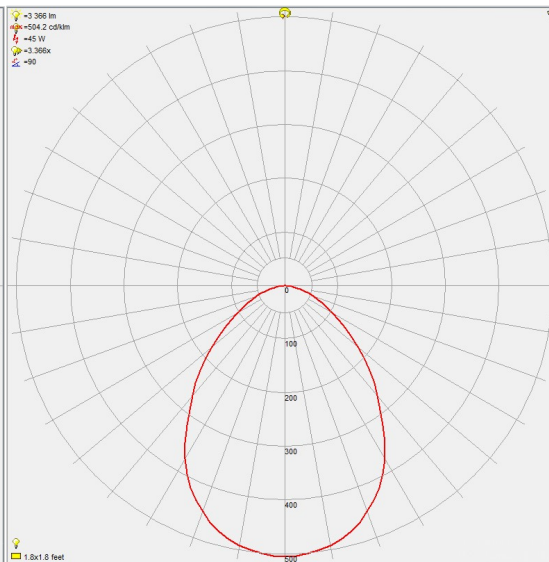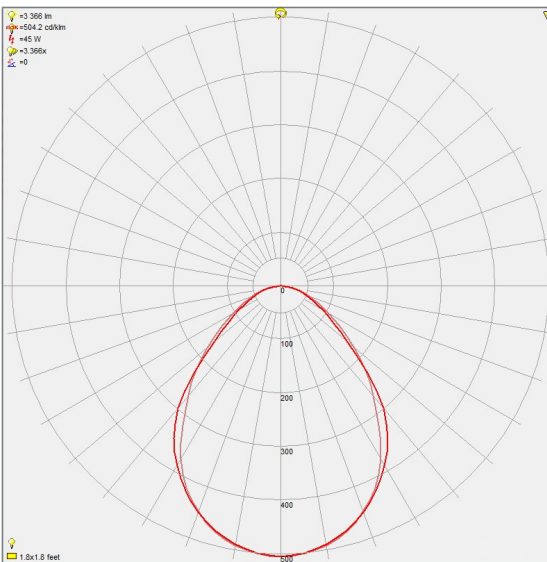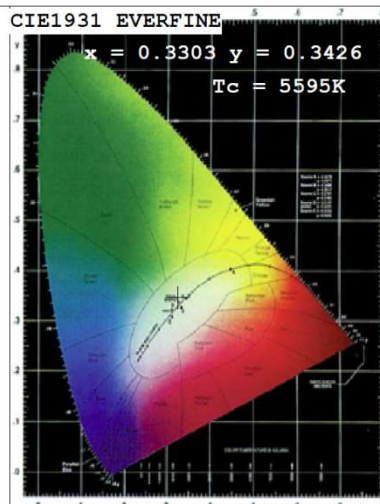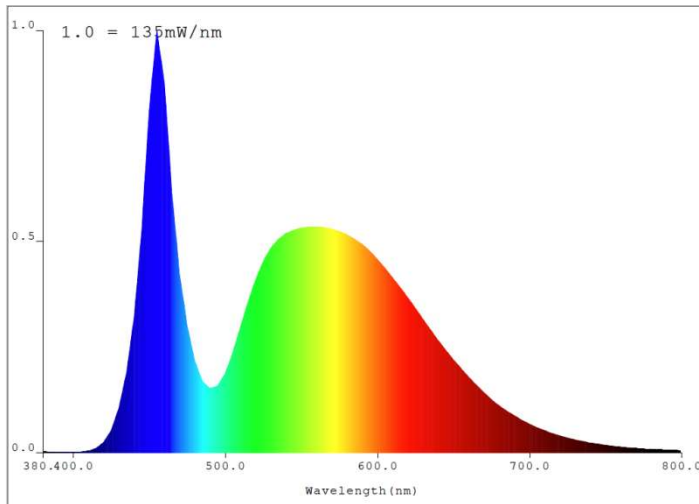

Model	Product	Power	Equivalent
LRK- nnnW-57K-xxxV	240W 5,700K LED Retrofit Kit	200W/240W	600W/1000W MH &/or HPS Lamp
Input Voltage	Power/Power Factor	Efficacy	Flux
120-480Vac ~50/60Hz	241W Max. P.F. > 0.9	>130 lm/W	31,200 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI ≈ 70	5,700K CCT ±10%	90°	50,000 Hours (L₇₀ B₅₀) T_[A] 25°C Max.