




Smart LED Lighting

# Modular Wall Wash LED Fixture



**300W LED Luminaires for**  
**Commercial & Industrial Buildings**  
**IP65 Dust & Water Proof**

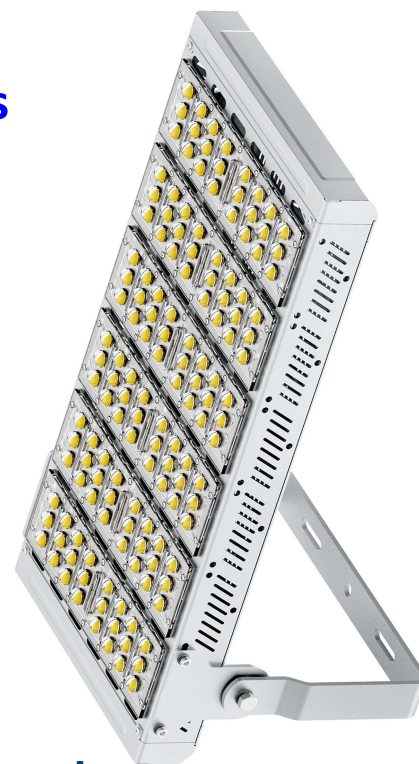

## Features & Benefits:

- Great Energy Savings ! •
- Directive NF/MF/WF Beam Angle •
- 5-Years | 50,000 Hours Warranty(\*) •
- High Power Factor – UL Listed Driver •
- Bright – High CRI – High Lumen Output •
- Built-in Surge Suppressors & Protection •
- CCT 5500K, 4000K, 3000K for MH & HPS Replacement •

40° / 90° / 150°x80° Beam Angle  
available on request

IP65 ≈ NEMA Enclosure Rating 4



Model	Product	Size	Power	Flux	Equivalent
MFL-300W-30K-WF-277V MFL-300W-30K-WF-480V	Modular Wall Wash LED Fixture 300W 3000K 150°x80° 277/480Vac	(L) 28½"	300W Max	42,000 Lumen	1,500W MH Lamp
MFL-300W-40K-WF-277V MFL-300W-40K-WF-480V	Modular Wall Wash LED Fixture 300W 4000K 150°x80° 277/480Vac	(W) 13¾"	300W Max	42,000 Lumen	1,500W MH Lamp
MFL-300W-55K-WF-277V MFL-300W-55K-WF-480V	Modular Wall Wash LED Fixture 300W 5500K 150°x80° 277/480Vac	(H) 3½"	300W Max	42,000 Lumen	1,500W MH Lamp

- "277V": 120-277Vac or "480V": 208-480Vac ~50/60Hz • P.F. > 0.9 • 3ft. Cable/Loose Leads Wires • THD <20% •
- CCT 5500K (55K), 4000K (40K), 3000K (30K) ±10% • CRI > 70 • ~150 lm/W •
- "NF" Narrow Flood 40°, "MF" Medium Flood 90°, "WF" Wide Flood 150°x80° •
- (\*) Rated Life 50,000 Hrs. (L<sub>70</sub> B<sub>50</sub>) at T<sub>A</sub> 25°C Max. •
- "Equivalent" ÷ Comparable Equivalence to Metal Halide (MH) Lamp & Fixtures