



Smart LED Lighting



30W Slim LED Shoebox Fixture


Outdoor Pole/Arm-Mounted Area and Roadway Luminaire

- Built-in Surge Protection •
- Horizontal Type II, Type III •
- High Power Factor • Low THD •
- High CRI • High Lumen Output •
- 5-Years | 50,000 Hours Warranty (*) •



Model	Product	Size	Power	Flux	Equivalent
SBF-30W-55K-277V	Slim LED Shoebox Fixture 30W 55K 277V	(L)12½" (W)5⅜" (D)3"	30W	4,500 lm	175W MH
SBF-30W-55K-480V	Slim LED Shoebox Fixture 30W 55K 480V	(L)12½" (W)5⅜" (D)3"	30W	4,500 lm	175W MH

- "277V" 120-277Vac || "480V" 208-480Vac ~50/60Hz • P.F. > 0.9 • THD < 20% • Terminal Block •
- Color Temp. (CCT) 5500K ±10% • 150 Lumen per Watt • CRI ≈ 80 •
- (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. •

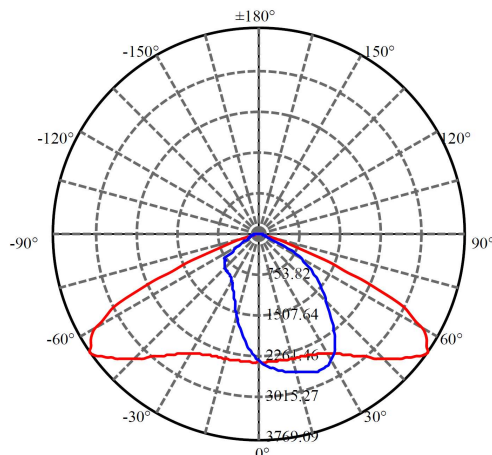

© Copyrights reserved, Olympia Lighting, Inc. USA 2025 • OLYMPIA® is a registered trademark of Olympia Lighting, inc.
20250801r3 www.OlympiaLighting.com • info@OlympiaLighting.com



Smart LED Lighting



LED Shoebox Fixture Mounting Accessories

“SC”: Shorting Cap
“PC”: Photo Cell Sensor



Tenon “ASF”:
Adjustable Slip Fitter



Tenon “FST”:
Flat Side Tenon



Tenon “RST”:
Round Side Tenon



Tenon “ATM”:
Adjustable
Trunnion Mount

Mount ►	ASF	FST	RST	ATM
	Adjustable Slip Fitter	Flat Side Tenon	Round Side Tenon	Adj. Trunnion Mount
Color ►	BRZ	BLK	SVR	WHT
	Bronze	Black	Silver	White
CCT ►	22K	30K	40K	50K
±10%	2200K	3000K	4000K	5000K
TYPE ►	T2	T3	T4	T5
Distribution	Type II	Type III	Type IV	Type V