



Smart LED Lighting



200W LED Shoebox Fixture

Outdoor Pole/Arm-Mounted Area and Roadway Luminaire

- Built-in Surge Protection •
- High Power Factor • Low THD •
- High CRI • High Lumen Output •
- Built-in Open-Neutral Protection •
- 5-Years | 50,000 Hours Warranty (*) •
- Class 2 Power Unit • DALI 2 Dimming (optional) •



- Wet location rated and corrosion resistant aluminum housing •

Model	Product	Size	Power	Flux	Equivalent
SBL-200W-50K-277V DLC ID: PPRNFMGR	LED Shoebox Luminaire 200W 30K-40K-50K 277V	L: 25" W: 10¼" H: 3½"	200W Typ.	30,000 Lumen	1,000W Metal Halide Lamp
SBL-200W-50K-480V DLC ID:	LED Shoebox Luminaire 200W 30K-40K-50K 480V	----- L: 64cm W: 26cm H: 9cm			





- "277V" 120-277Vac || "480V" 208-480Vac ~50/60Hz • P.F. > 0.9 • THD < 20% • Pigtail Wire Cable •
- Color Temp. (CCT) 30K (3000K), 40K (4000K), 50K (5000K) ±10% • ~150 Lumen per Watt •
- CRI ≈ 80 • (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. •



Smart LED Lighting



200W LED Shoebox Fixture

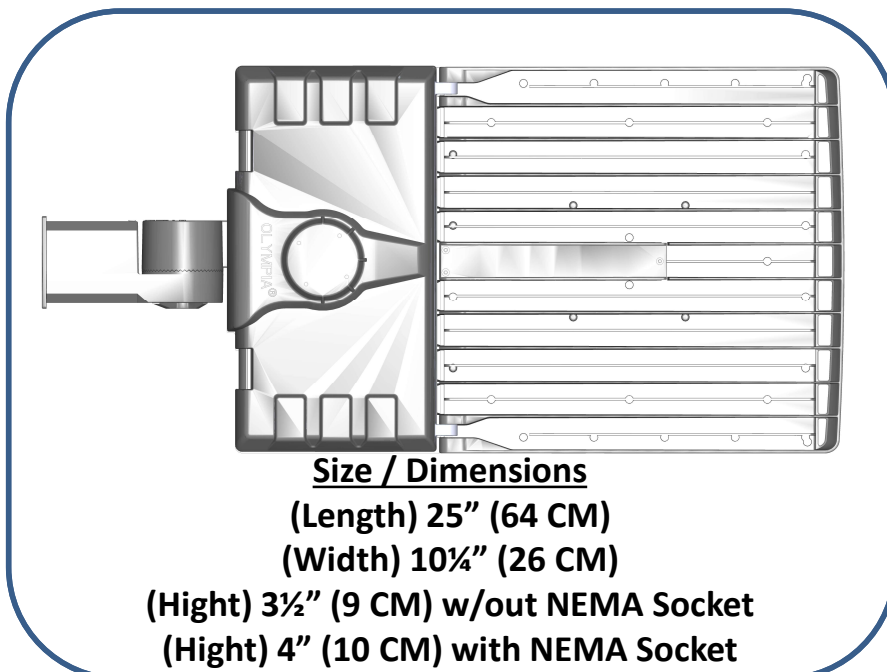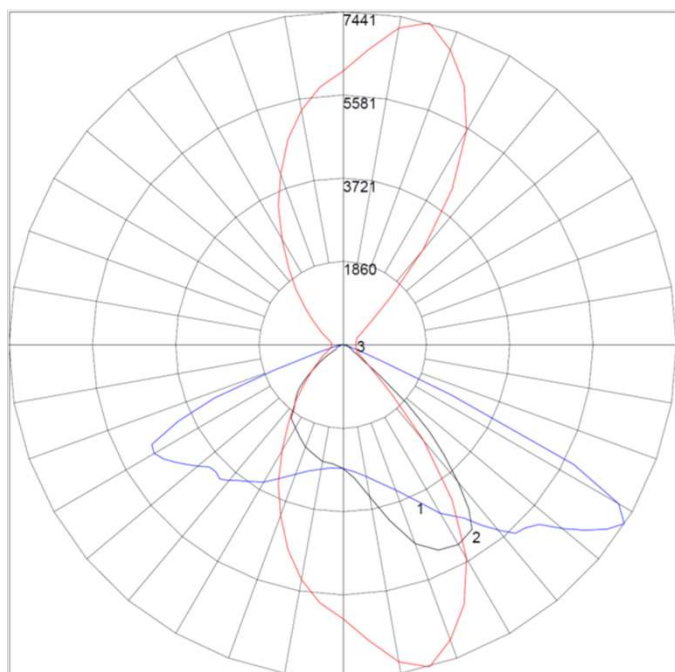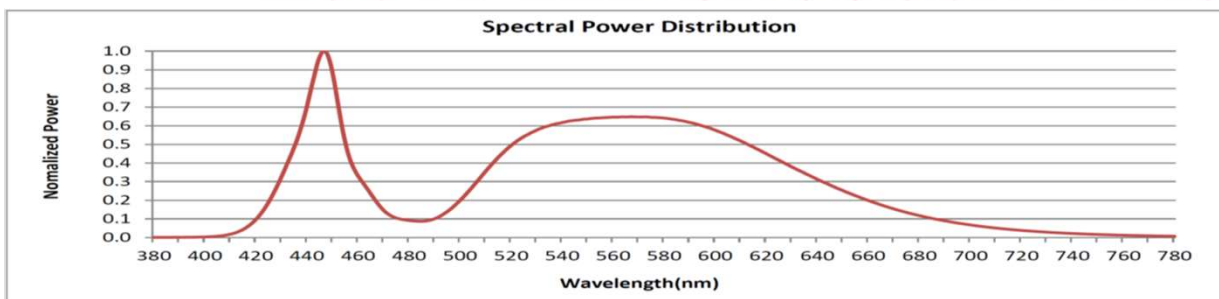

Model	Product	Power	Equivalent
SBL-200W-ccK-xxxV	LED Shoebox Luminaire 200W 30K-40K-50K xxxV	200W	1,000W MH/HPS
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz 208-480Vac ~50/60Hz	200W P.F. ≈ 0.88	150 Lumens per Watt	30,000 Lumens
Color Rendering	Color Temperature	Beam Angle	Life
CRI 80	30K-40K-50K ±10%	150° X 75°	5-Years / 50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.




Smart LED Lighting



LED Shoebox Fixture Mounting Accessories

"SC": Shorting Cap

"PC" Photo Cell Sensor →

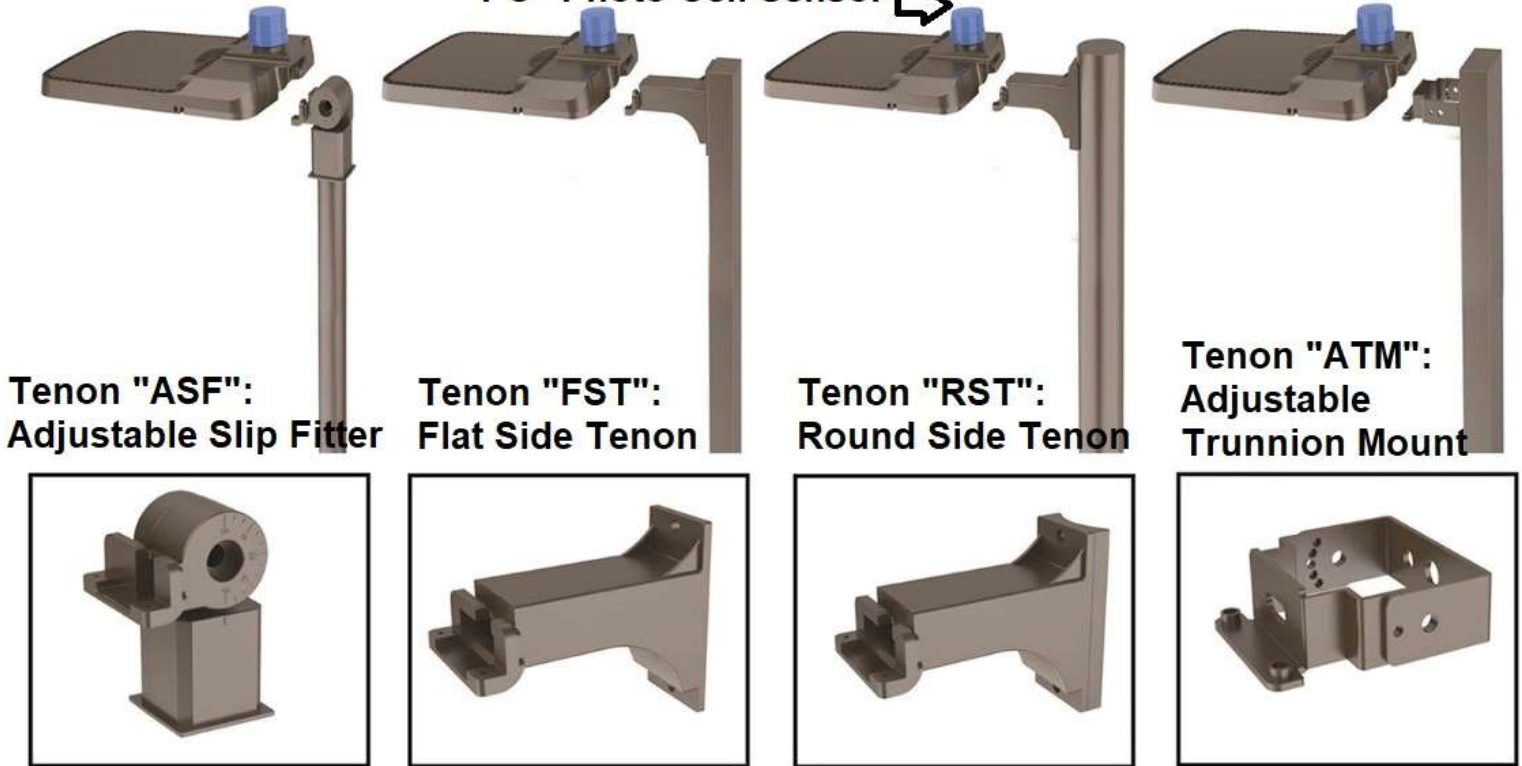

Tenon "ASF":
Adjustable Slip Fitter

Tenon "FST":
Flat Side Tenon

Tenon "RST":
Round Side Tenon

Tenon "ATM":
Adjustable
Trunnion Mount

Mount ►	ASF	FST	RST	ATM
	Adjustable Slip Fitter	Flat Side Tenon	Round Side Tenon	Adj. Trunnion Mount
Color ►	BRZ	BLK	SVR	WHT
	Bronze	Black	Silver	White
CCT ►	22K	30K	40K	50K
±10%	2200K	3000K	4000K	5000K
TYPE ►	T2	T3	T4	T5
Distribution	Type II	Type III	Type IV	Type V