



Smart LED Lighting



250W LED Shoebox Fixture

Outdoor Pole/Arm-Mounted Area and Roadway Luminaire

- Built-in Surge Protection •
- High Power Factor • Low THD •
- High CRI • High Lumen Output •
- Built-in Open-Neutral Protection •
- 5-Years | 50,000 Hours Warranty (*) •
- Class 2 Power Unit • DALI 2 Dimming (optional) •



- Wet location rated and corrosion resistant aluminum housing •





Model	Product	Size	Power	Flux	Equivalent
SBL-250W-ccK-277V DLC ID: PR1A63E9	LED Shoebox Luminaire 250W 30K-40K-50K 277V	L: 25" W: 10¼" H: 3½"	250W Typ.	37,500 Lumen	1,000W Metal Halide Lamp
SBL-250W-ccK-480V DLC ID: PTUS8CCZ	LED Shoebox Luminaire 250W 30K-40K-50K 480V	----- L: 64cm W: 26cm H: 9cm			

- "277V" 120-277Vac || "480V" 208-480Vac ~50/60Hz • P.F. > 0.9 • THD < 20% • Pigtail Wire Cable •
- Color Temp. (CCT) 30K (3000K), 40K (4000K), 50K (5000K) ±10% • ~150 Lumen per Watt •
- CRI ≈ 80 • (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. • EPA 2.9 •
- Operating Temperature Range -30°C (-22°F) to +45°C (113°F) @ 20%~90% RH •



Smart LED Lighting

250W LED Shoebox Fixture

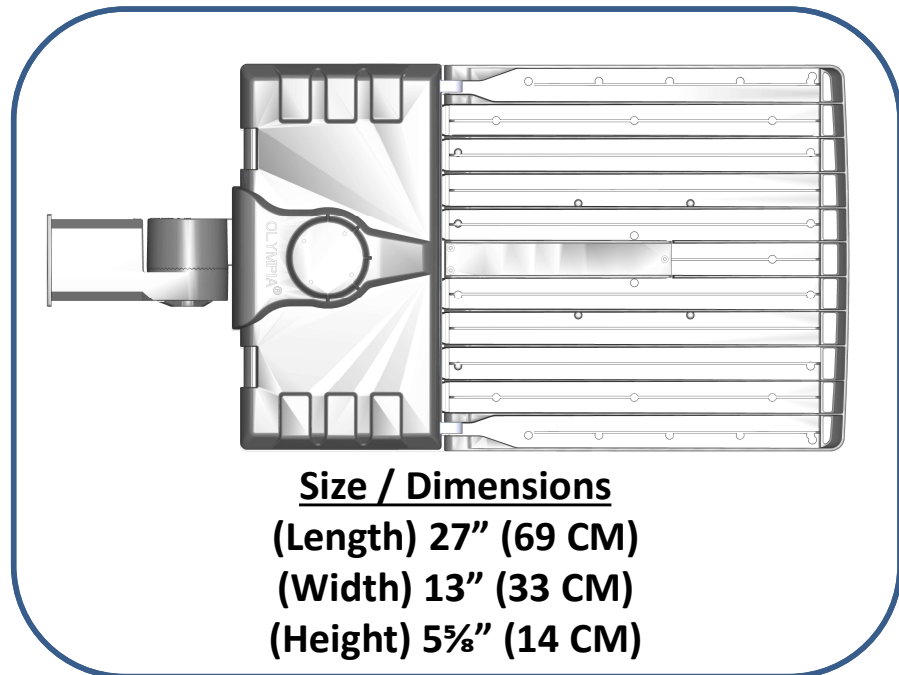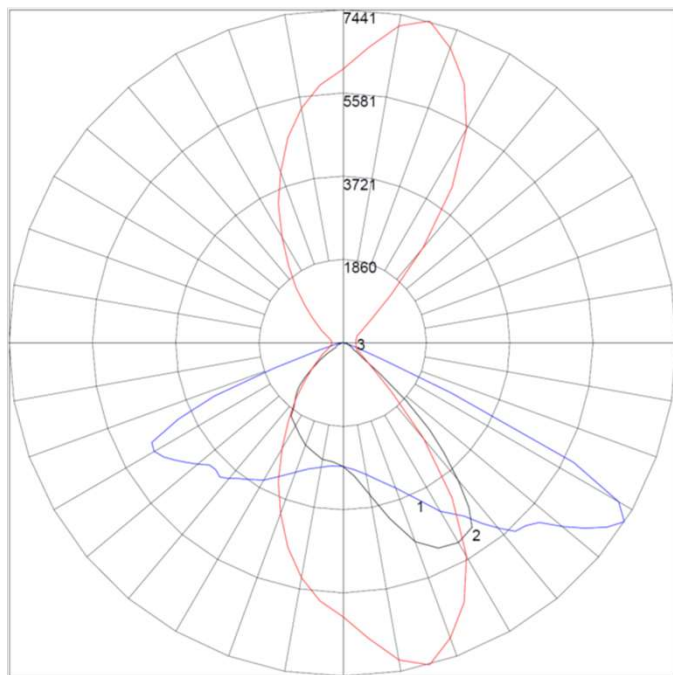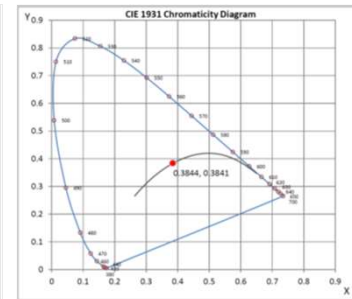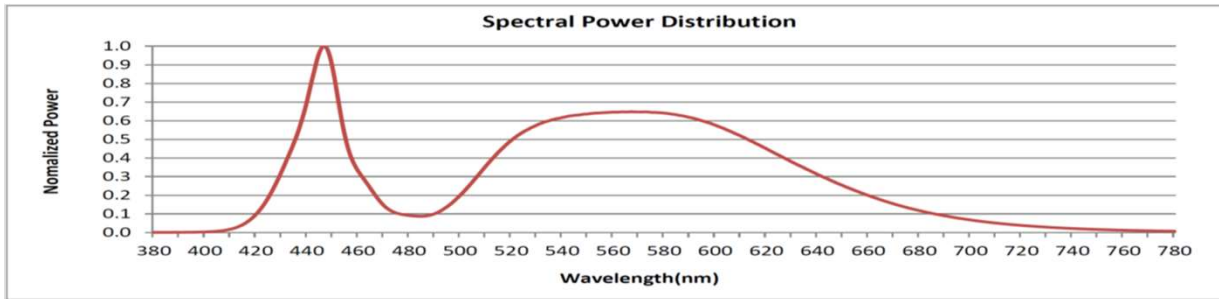

Model	Product	Power	Equivalent
SBL-250W-ccK-xxxV	LED Shoebox Luminaire 250W 30K-40K-50K 277V/480V ~50/60Hz	250W	1,000W MH/HPS
Input Voltage	Power/Power Factor	Efficacy	Flux
277V: 120-277Vac 480V: 208-480Vac	250W P.F. ≈ 0.99	150 Lumens per Watt	37,500 Lumens
Color Rendering	Color Temperature	Beam Angle	Life
CRI 80	CCT 1800K, 3000K, 4000K, 5000K ±10%	150°x75°	5-Years / 50,000 Hrs (L ₇₀ B ₅₀) T _[A] 25°C Max.




Smart LED Lighting



LED Shoebox Fixture Mounting Accessories

"SC": Shorting Cap

"PC" Photo Cell Sensor →

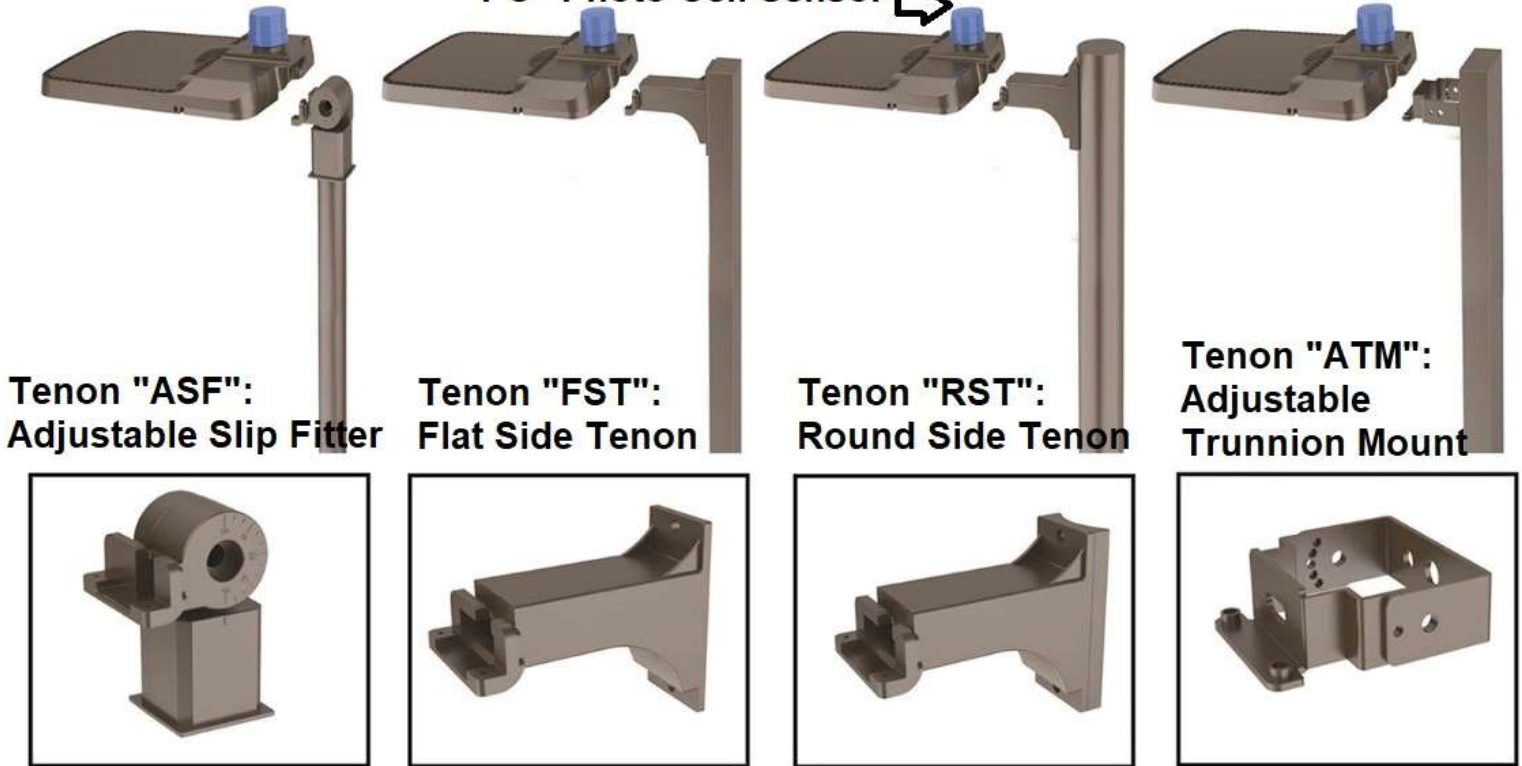

Mount ►	ASF	FST	RST	ATM
	Adjustable Slip Fitter	Flat Side Tenon	Round Side Tenon	Adj. Trunnion Mount
Color ►	BRZ	BLK	SVR	WHT
	Bronze	Black	Silver	White
CCT ►	22K	30K	40K	50K
±10%	2200K	3000K	4000K	5000K
TYPE ►	T2	T3	T4	T5
Distribution	Type II	Type III	Type IV	Type V