



Smart LED Lighting



2x2' Backlit LED Panel

Color & Power Adjustable

Luminaires for Ambient Lighting of Interior Commercial Spaces

- 0-10V Dimmable LED Driver •
- High Power Factor • Self Ballasted •
- 5-Years | 50,000 Hours Warranty (*) •
- CCT Adjustable 30K-35K-40K-50K-65K •
- Bright • High CRI • High Lumen Output •
- Power Adjustable 20W-25W-30W-35W-40W •



Model	Product	Power	Flux	Equal
T-BAR-2x2FT-40WD-30K-3065K-CPA	2x2' Backlit LED Panel 0-10V DIM 120~277V	20W	2,600	4 x F17T8 (2ft. 17W)
DLC PREMIUM QPL ID: S-MFBG86	2x2 Luminaires for Ambient Lighting of Interior Commercial Spaces	25W	3,250	2 x F32T8 (4ft. 32W)
		30W	3,900	
		35W	4,550	
Manufacture: OLYMPIA		40W	5,200	2 x FB32T8 (U-Bent 32W)
		0-10V Dimmable	Lumens	

- 120-277Vac ~50/60Hz • Junction Box / Terminals • P.F. > 0.9 • THD < 20% •
- (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_[A] 25°C Max. • 130 Lm/W • CRI > 80 •
- CCT Selectable: 3000K – 3500K – 4000K – 5000K – 6500K ±10% •





Smart LED Lighting




2x2' LED Panel

CCT & PWR Adjustable

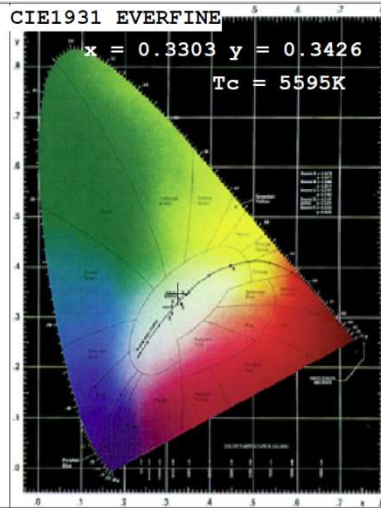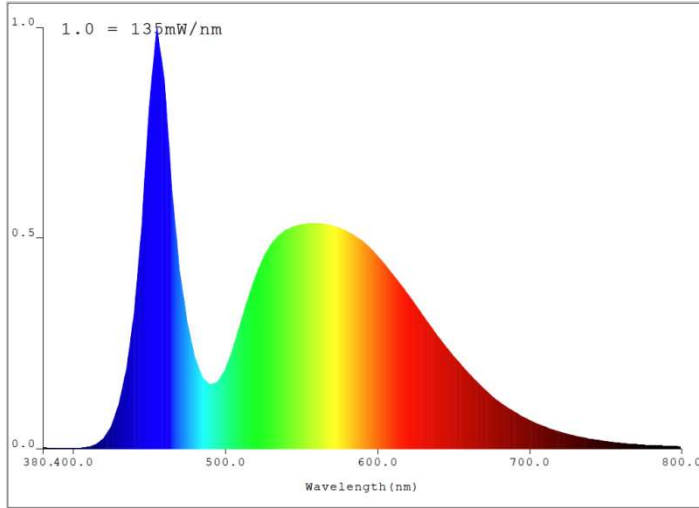

Panel Dim:
(L) 24" x (W) 24" x (T) 1 5/8"
CTN QTY: 6 pcs
Carton Dim:
(L) 30" x (W) 9.1" x (H) 26.5"
CTN WT.: 25 LBS
Pallet QTY:
24 CTNS / 144 pcs
Pallet Dim:
(L) 48" x (W) 40" x (H) 83"
Pallet WT: 630 LBS.

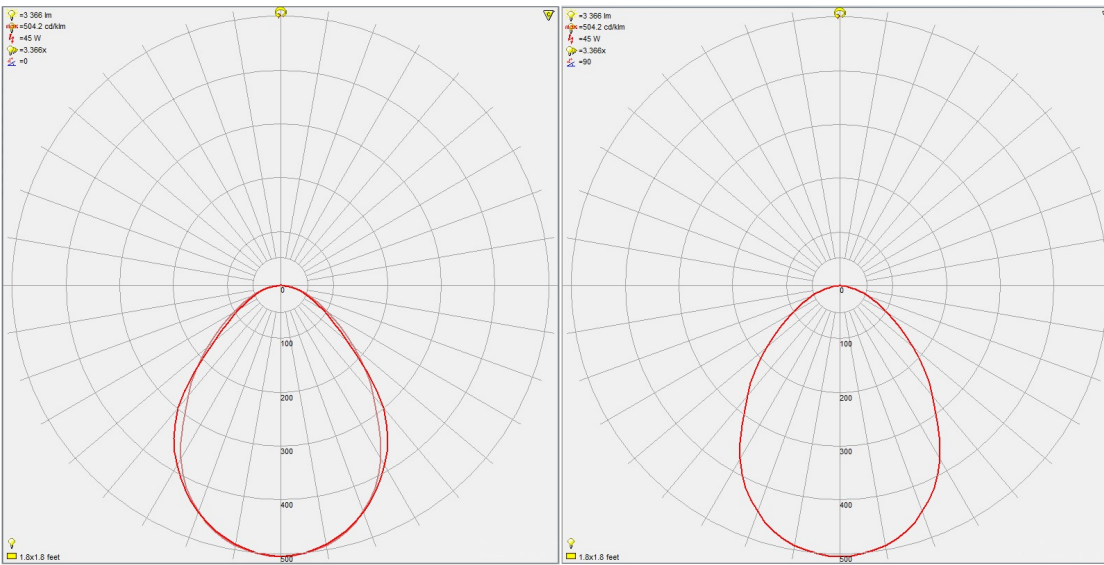

Model	Product	Power	Equivalent
T-BAR-2x2FT-40WD-30K-3065K-CPA	2x2' Backlit LED Panel CCT + PWR ADJ. & DIM	20W ~ 40W 0-10V DIM	T8/T12 & U-Bent Tube
Input Voltage	Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	P.F. ≈ 0.9	130 Lm/W	2,600 ~ 5,200 Lumens
Color Rendering	Color Temperature	Beam Angle	Life
CRI > 80	3000K – 3500K – 4000K – 5000K – 6500K ±10%	120°	5-Years / 50,000 Hrs (L ₇₀ B ₅₀) T _[A] 25°C Max.