



Smart LED Lighting




2x4' Backlit LED Panel

Color & Power Adjustable

Luminaires for Ambient Lighting of Interior Commercial Spaces

- 0-10V Dimmable LED Driver •
- High Power Factor • Self Ballasted •
- 5-Years | 50,000 Hours Warranty (*) •
- CCT Adjustable 30K-35K-40K-50K-65K •
- Bright • High CRI • High Lumen Output •
- Power Adjustable 30W-40W-50W-60W-72W •

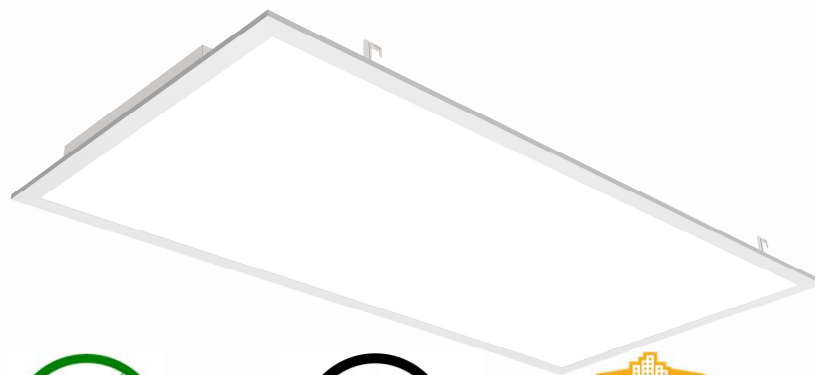

Model	Product	Power	Flux	Equal
T-BAR-2x4FT-72WD-30K-3065K-CPA	2x4' Backlit LED Panel 0-10V DIM 120~277V	30W 40W 50W 60W 72W 0-10V Dimmable	3,900 5,200 6,500 7,800 9,360 Lumens	4 x F32T8 (4ft. 32W) 4 x F54T5 (4ft. 54W)
DLC PREMIUM QPL ID: S-PD2N4G	2x4 Luminaires for Ambient Lighting of Interior Commercial Spaces			
Manufacture: OLYMPIA				



- 120-277Vac ~50/60Hz • Junction Box / Terminals • P.F. > 0.9 • THD < 20% •
- (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. • 130 Lm/W • CRI > 80 •
- CCT Selectable: 3000K – 3500K – 4000K – 5000K – 6500K ±10% •




Smart LED Lighting

2x4' LED Panel

CCT & PWR Adjustable

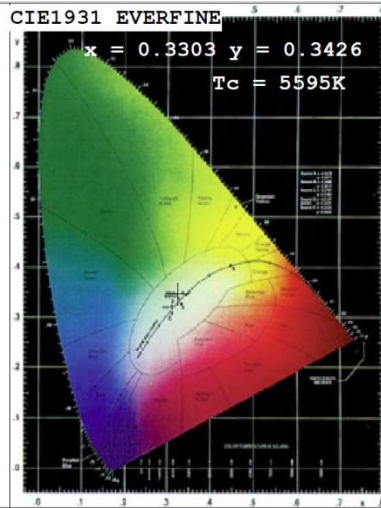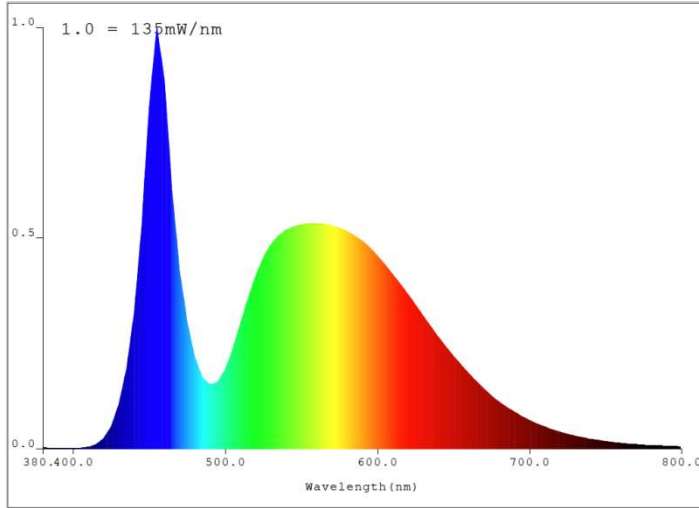

Panel Dim:
(L) 48" x (W) 24" x (T) 1 5/8"
CTN QTY: 4 pcs
Carton Dim:
(L) 50.5" x (W) 6.5" x (H) 26.5"
CTN WT.: 34 LBS
Pallet QTY:
18 CTNS / 72 pcs
Pallet Dim:
(L) 48" x (W) 40" x (H) 83"
Pallet WT: 640 LBS.

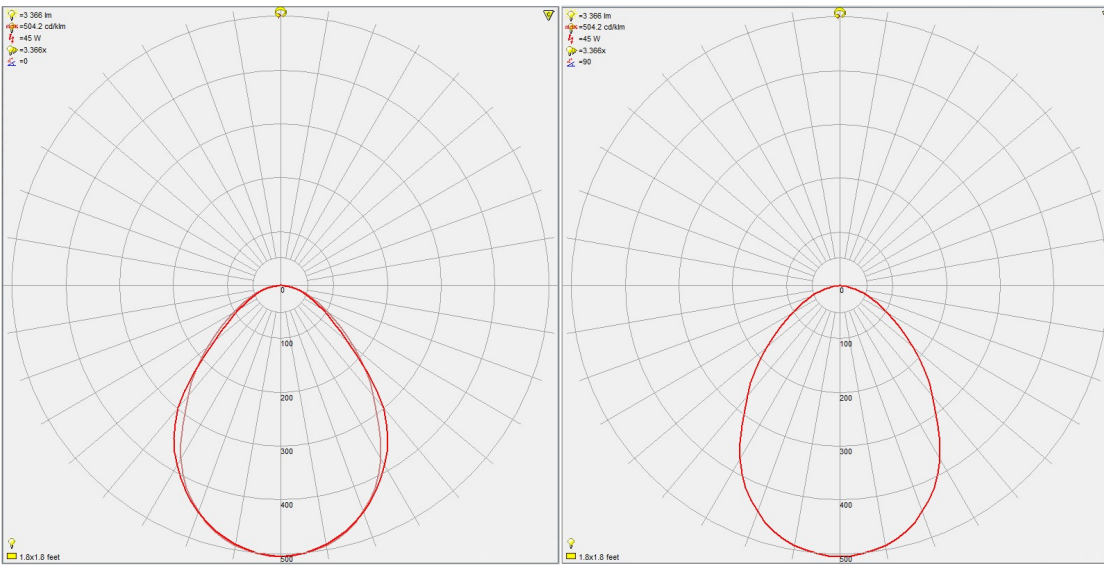

Model	Product	Power	Equivalent
T-BAR-2x4FT-72WD-30K-3065K-CPA	2x4' Backlit LED Panel CCT + PWR ADJ. & DIM	30W ~ 72W 0-10V DIM	T8/T12 & T5/T5HO FL Tube
Input Voltage	Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	P.F. ≈ 0.9	130 Lm/W	3,900 ~ 9,360 Lumens
Color Rendering	Color Temperature	Beam Angle	Life
CRI > 80	3000K – 3500K – 4000K – 5000K – 6500K ±10%	120°	5-Years / 50,000 Hrs (L ₇₀ B ₅₀) T _[A] 25°C Max.